



**SMA**  
**Lead Free and RoHS Compliance Document**

Contents:


1. Composition
2. Solder Reflow
3. TIn Whisker Report
4. RoHS Certification
5. Independent Laboratory Analysis



**SMA**

Component	Material Name	Material Mass (gr/ea)	Element Name Composition	Substance Mass (per device) g	Material Analysis Weight (%)	% of Total Weight
Chip	Silicon	0.00190	Si	0.00190	100%	2.8%
Encapsulant	Epoxy Resin	0.03220	SiO2	0.02254	70%	32.8%
			Epoxy	0.00805	25%	11.7%
			Other	0.00161	5%	2.3%
Lead Frame	Copper	0.03192	Cu	0.02600	81%	37.8%
			Fe	0.00570	18%	8.3%
			Other	0.00022	1%	0.3%
Die Attach	Soft Solder	0.00265	Pb	0.00239	90%	3.5%
			Sn	0.00022	8%	0.3%
			Ag	0.00004	2%	0.1%
Lead Finish	Tin	0.00006	Sn	0.00006	100%	0.1%

Total Weight (g) **0.06873**

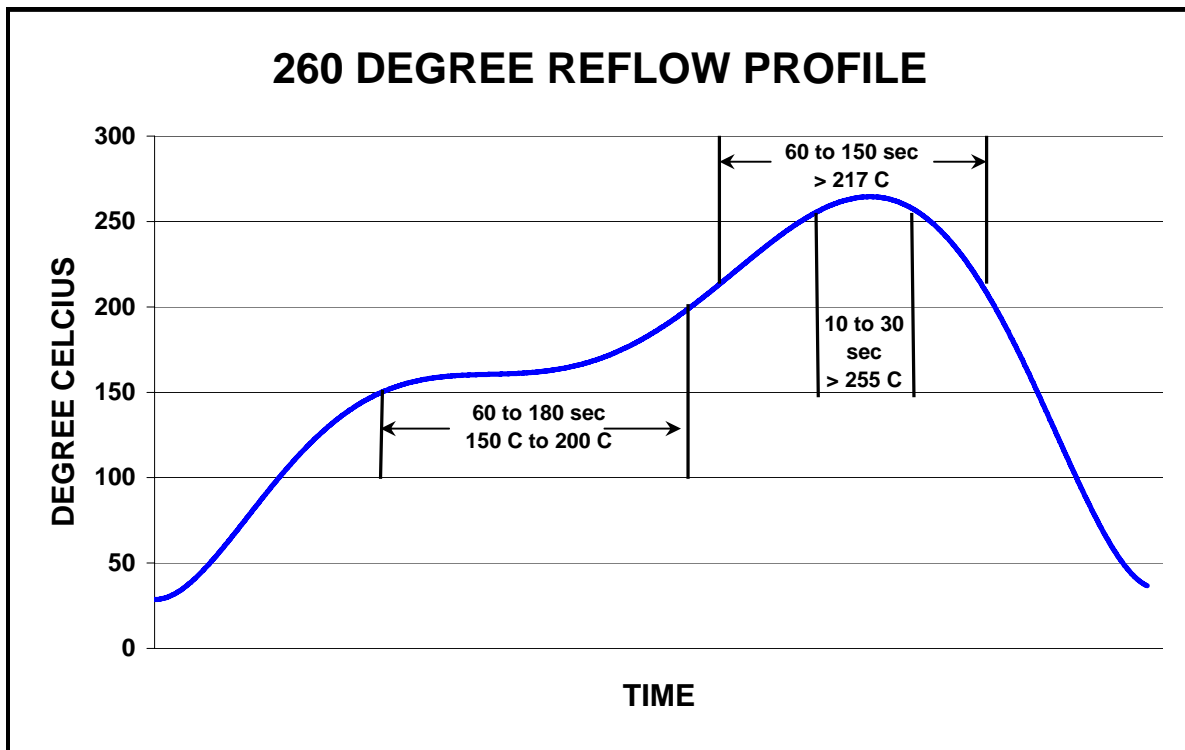

This part is compliant with EU Directive 2002/95/EC (RoHS) and does not contain lead, mercury, cadmium (0.01%), hexavalent chromium, PBB or PBDE in concentrations greater than 0.1%, except as permitted by Annex (7).

The information contained in this attachment is being provided for informational purposes only. Nothing provided in this attachment is (i) a representation, warranty, or agreement to indemnification by IR, (ii) a statement which may form the basis of reliance by IR, (iii) a modification of any of the terms and conditions of sales agreed to in writing between IR and its customers with respect to any IR products, whether previously sold or to be sold in the future.



## SMA, SMB & SMC Tin Whisker Report

**Objective:** To evaluate the Tin whisker growth for various test conditions on PBF products

Part No: SMA, SMB, SMC

Package Type: SOICN-8L

A

Test	Long Temperature Storage	Temperature Humidity Unbias	Temperature Cycling
Test Conditions	30+/-2°C, 70-85+/-3%RH	60+/-5°C, 93+3/-2%RH	-55 to 85°C
Test Status / Readpoint	NWF / 1000 hr	NWF /	WFA /

**Examples:**

Whisker Length (µm)	0	0	0

Abbreviation	NWF	WFA	WFO
Whisker length pass/fail criterion	No Whiskers Found Whisker length less than 10 µm is considered insignificant	Whiskers found within acceptable range Whisker length less than 40 µm is considered pass	Whiskers found over acceptable range Whisker length exceeding 40 µm is considered fail

**Sn Plating descriptions:**

Plating thickness (µin): >300 to 800  
 Annealing conditions: 150°C for 1 hour  
 Plating finish: 100% Sn Matte

Sample size: 10 pieces per test  
 Reflow: 1X @ 255°C

# International IOR Rectifier


International Rectifier components and their homogeneous sub-components manufactured under the Lead Free Program <sup>(1)</sup> are in compliance with European Union Directive 2002/95/EC (RoHS Directive) of the European Parliament and of the Council of 27 January 2003. IR parts that have been identified as RoHS compliant do not exceed the maximum limit for following 6 designated substances.

Substance	Maximum Limit (ppm)
Cadmium (Cd)	100
Lead (Pb)	1000 <sup>(2)</sup>
Mercury (Hg)	1000
Hexavalent Chromium (Cr <sup>6+</sup> )	1000
Poly Brominated Biphenyls (PBB)	1000
Poly Brominated Diphenyl Ethers (PBDE)	1000


- (1) Part numbers typically contain a "PBF" suffix
- (2) Maximum limit (ppm) does not apply to applications for which exemptions have been granted by the RoHS Directive

Our statements in this letter regarding RoHS compliance and lead content do not extend to, or apply to any product subjected to unintended contamination, misuse, neglect, accident, improper installation, or to use in violation of instructions furnished by IR. We additionally note that IR products in certain specific large outline packages could contain high temperature solder die attach material having greater than 85% lead content, which is considered exempt from ELV Directive, Article 4(2)(a) by Annex II and RoHS Directive, Article 4(1) by Annex (7).

Authorized signatures for International Rectifier:

Name:  Greg Takagi Date: 8/22/2005

Position: Director, Global Environmental Health and Safety

Name:  Danny Narabal Date: 8/23/05

Position: Director, Package Engineering

The information contained in this letter is being provided for informational purposes only and to clarify certain information concerning IR products. Nothing provided in this letter is (i) a representation, warranty or agreement to indemnification by IR, (ii) a statement which may form the basis of reliance by IR, (iii) a modification of any of the terms and conditions of sale agreed to in writing between IR and its customers with respect to any IR products, whether previously sold or to be sold in the future.



Results:

	PBB/PDBE	Cr(VI)	PVC	Asbestos
Sample Name	ppm (wt.)	ppm (wt.)	ppm (wt.)	P/NP
Blank	<10.	<1.0	<1.0	NP
IRF4905PBF (TO-220)	<10.	<1.0	<1.0	NP
IRFP450PBF (TO-247)	<10.	<1.0	<1.0	NP
IRF740SPBF (D2-PAK)	<10.	<1.0	<1.0	NP
IRFR3707ZPBF (D-PAK)	<10.	<1.0	<1.0	NP
IRLL2705PBF (SOT-223)	<10.	<1.0	<1.0	NP
IRF6603 (DirectFET)	<10.	<1.0	<1.0	NP
IRLML6401TRPBF (Micro-3)	<10.	<1.0	<1.0	NP
IRLMS6802TRPBF (Micro-6)	<10.	<1.0	<1.0	NP
IRF7821PBF(SO-8)	<10.	<1.0	<1.0	NP
IR2153PBF (8L PDIP)	<10.	<1.0	<1.0	NP
IRF7503TRPBF (Micro-8)	<10.	<1.0	<1.0	NP
IR3086AMPBF (20L MLPQ)	<10.	<1.0	<1.0	NP