

International
IRF Rectifier
 SCHOTTKY RECTIFIER
 HIGH EFFICIENCY SERIES

PD-20532F

12CLQ150
 JANS1N7039CCU1
 JANTX1N7039CCU1
 JANTXV1N7039CCU1

35Amp, 150V
 Ref: MIL-PRF-19500/737


Major Ratings and Characteristics

Characteristics	1N7039CCU1	Units
$I_{F(AV)}$	35	A
V_{RRM} (Per Leg)	150	V
I_{FSM} @ $t_p = 8.3ms$ half-sine (Per Leg)	200	A
V_F @ 15Apk, $T_J = 125^\circ C$ (Per Leg)	0.86	V
T_J, T_{stg} Operating and storage	-65 to 150	$^\circ C$

Description/Features

The 1N7039CCU1 center tap Schottky rectifier has been expressly designed to meet the rigorous requirements of high reliability environments. It is packaged in the hermetic surface mount SMD-1 ceramic package. The device's forward voltage drop and reverse leakage current are optimized for the lowest power loss and the highest circuit efficiency for typical high frequency switching power supplies and resonant power converters. Full MIL-PRF-19500 quality conformance testing is available on source control drawings to TX, TXV and S quality levels.

- Hermetically Sealed
- Center Tap
- Low Forward Voltage Drop
- High Frequency Operation
- Guard Ring for Enhanced Ruggedness and Long term Reliability
- Surface Mount
- Lightweight

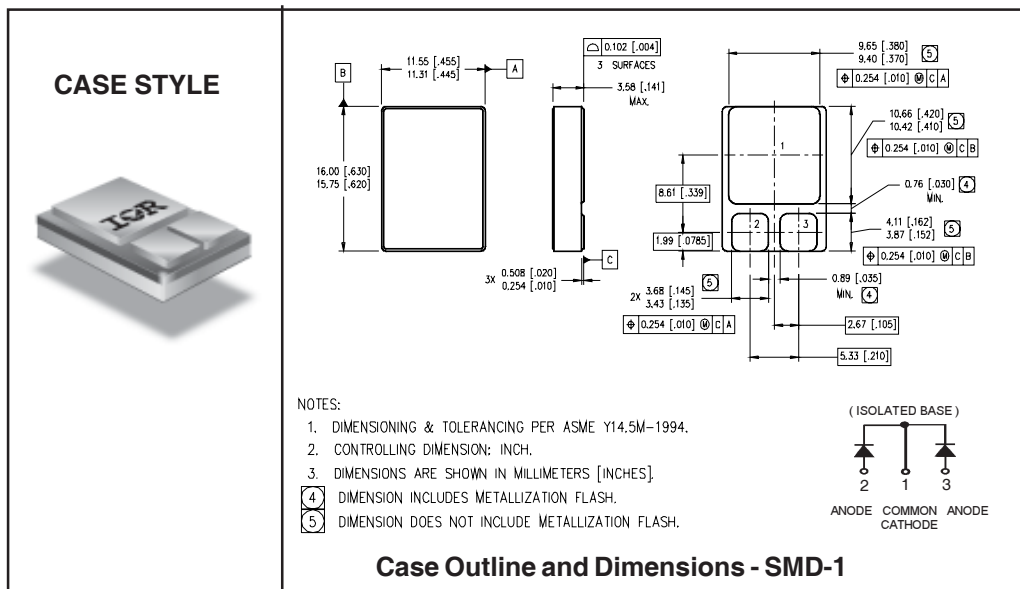

Voltage Ratings

Part number	1N7039CCU1
V_R Max. DC Reverse Voltage (V) (Per Leg)	150
V_{RWM} Max. Working Peak Reverse Voltage (V) (Per Leg)	

Absolute Maximum Ratings

Parameters	Limits	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current See Fig. 5	35	A	50% duty cycle @ $T_C = 95^\circ\text{C}$, square waveform
I_{FSM} Max. Peak One Cycle Non - Repetitive Surge Current (Per Leg)	200	A	@ $t_p = 8.3$ ms half-sine

Electrical Specifications

Parameters	Limits	Units	Conditions	
V_{FM} Max. Forward Voltage Drop (Per Leg) See Fig. 1 ①	1.35	V	@ 15A	$T_J = -55^\circ\text{C}$
	1.13	V	@ 15A	$T_J = 25^\circ\text{C}$
	1.60	V	@ 35A	
	0.86	V	@ 15A	$T_J = 125^\circ\text{C}$
	1.20	V	@ 35A	
I_{RM} Max. Reverse Leakage Current (Per Leg) See Fig. 2 ①	0.5	mA	$T_J = 25^\circ\text{C}$	$V_R = \text{rated } V_R$
	15	mA	$T_J = 125^\circ\text{C}$	
C_T Max. Junction Capacitance (Per Leg)	350	pF	$V_R = 5V_{DC}$ (1MHz, 25°C)	
L_S Typical Series Inductance (Per Leg)	5.9	nH	Measured from center of cathode pad to center of anode pad	

Thermal-Mechanical Specifications

Parameters	Limits	Units	Conditions	
T_J Max. Junction Temperature Range	-65 to 150	$^\circ\text{C}$		
T_{stg} Max. Storage Temperature Range	-65 to 150	$^\circ\text{C}$		
R_{thJC} Max. Thermal Resistance, Junction to Case (Per Leg)	1.67	$^\circ\text{C}/\text{W}$	DC operation	See Fig. 4
R_{thJC} Max. Thermal Resistance, Junction to Case (Per Package)	0.83	$^\circ\text{C}/\text{W}$	DC operation	
wt Weight (Typical)	2.6	g		
Die Size	125X125	mils		
Case Style	SMD-1			

① Pulse Width < 300 μs , Duty Cycle < 2%

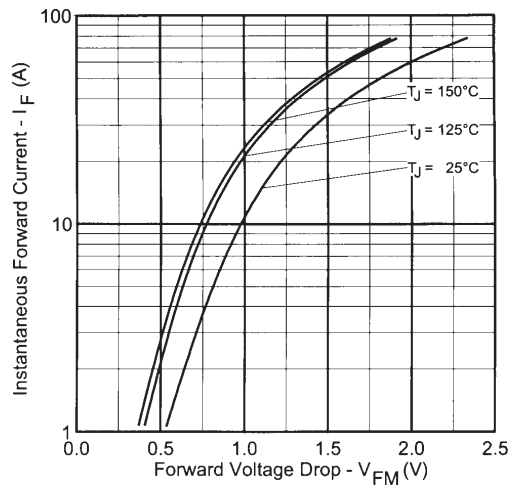


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

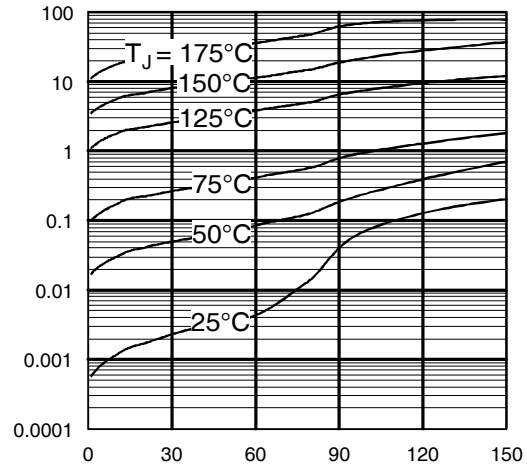


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage (Per Leg)

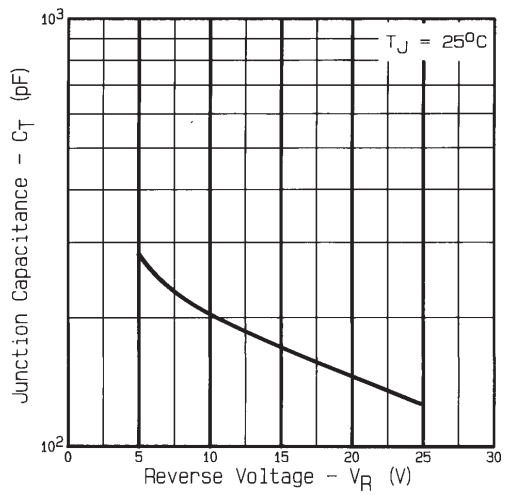


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

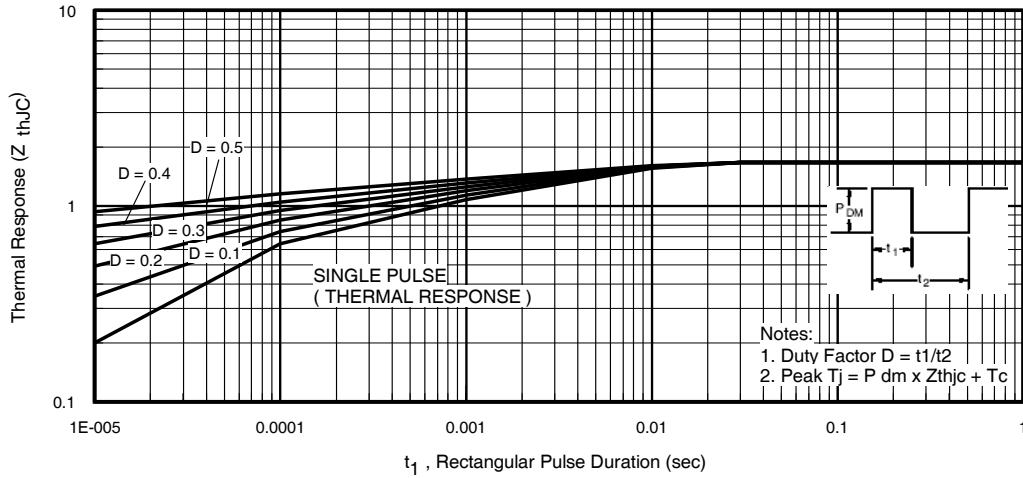


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

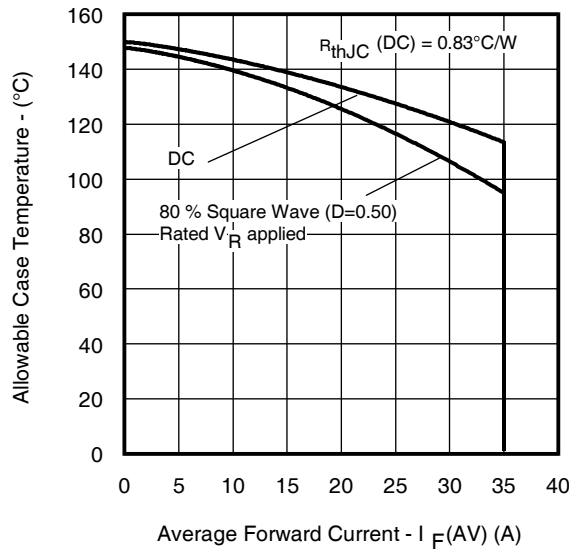


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current