



15TQ060 15TQ060S

SCHOTTKY RECTIFIER

15 Amp

$I_{F(AV)} = 15 \text{ Amp}$
 $V_R = 60V$

Major Ratings and Characteristics





| Characteristics | Values | Units |
|--|------------|------------------|
| $I_{F(AV)}$ Rectangular waveform | 15 | A |
| V_{RRM} | 60 | V |
| I_{FSM} @tp = 5 μ s sine | 1000 | A |
| V_F @15 Apk, $T_J = 125^\circ\text{C}$ | 0.56 | V |
| T_J range | -55 to 150 | $^\circ\text{C}$ |

Description/Features

The 15TQ060 Schottky rectifier has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to 150° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150° C T_J operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

Case Styles

| | |
|--|---|
| <p>15TQ060</p>   <p>TO-220AC</p> | <p>15TQ060S</p>   <p>D²PAK</p> |
|--|---|

Voltage Ratings

| Part number | 15TQ060 |
|---|---------|
| V_R Max. DC Reverse Voltage (V) | 60 |
| V_{RWM} Max. Working Peak Reverse Voltage (V) | |

Absolute Maximum Ratings

| Parameters | 15TQ | Units | Conditions |
|---|------|-------|--|
| $I_{F(AV)}$ Max. Average Forward Current * See Fig. 5 | 15 | A | 50% duty cycle @ $T_C = 104^\circ\text{C}$, rectangular wave form |
| I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 7 | 1000 | A | Following any rated load condition and with rated V_{RRM} applied |
| | 260 | | |
| E_{AS} Non-Repetitive Avalanche Energy | 6 | mJ | $T_J = 25^\circ\text{C}$, $I_{AS} = 1.50\text{Amps}$, $L = 11.5\text{mH}$ |
| I_{AR} Repetitive Avalanche Current | 1.50 | A | Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical |

Electrical Specifications

| Parameters | 15TQ | Units | Conditions |
|---|-------|------------------|---|
| V_{FM} Max. Forward Voltage Drop (1) * See Fig. 1 | 0.62 | V | @ 15A $T_J = 25^\circ\text{C}$ |
| | 0.82 | V | @ 30A |
| | 0.56 | V | @ 15A $T_J = 125^\circ\text{C}$ |
| | 0.71 | V | @ 30A |
| I_{RM} Max. Reverse Leakage Current (1) * See Fig. 2 | 0.80 | mA | $T_J = 25^\circ\text{C}$ |
| | 45 | mA | $T_J = 125^\circ\text{C}$ $V_R = \text{rated } V_R$ |
| C_T Max. Junction Capacitance | 720 | pF | $V_R = 5V_{DC}$, (test signal range 100Khz to 1Mhz) 25°C |
| L_S Typical Series Inductance | 8.0 | nH | Measured lead to lead 5mm from package body |
| dv/dt Max. Voltage Rate of Change (Rated V_R) | 10000 | V/ μs | |

(1) Pulse Width < 300 μs , Duty Cycle < 2%

Thermal-Mechanical Specifications

| Parameters | 15TQ | Units | Conditions |
|---|------------|-------------------------------|--------------------------------------|
| T_J Max. Junction Temperature Range | -55 to 150 | $^\circ\text{C}$ | |
| T_{stg} Max. Storage Temperature Range | -55 to 150 | $^\circ\text{C}$ | |
| R_{thJC} Max. Thermal Resistance Junction to Case | 3.25 | $^\circ\text{C/W}$ | DC operation * See Fig. 4 |
| R_{thCS} Typical Thermal Resistance, Case to Heatsink | 0.50 | $^\circ\text{C/W}$ | Mounting surface, smooth and greased |
| wt Approximate Weight | 2 (0.07) | g (oz.) | |
| T Mounting Torque | Min. | 6 (5) | Kg-cm (lbf-in) |
| | Max. | 12 (10) | |
| Marking Device | 15TQ060 | Case Style TO-220 | |
| | 15TQ060S | Case Style D ² Pak | |

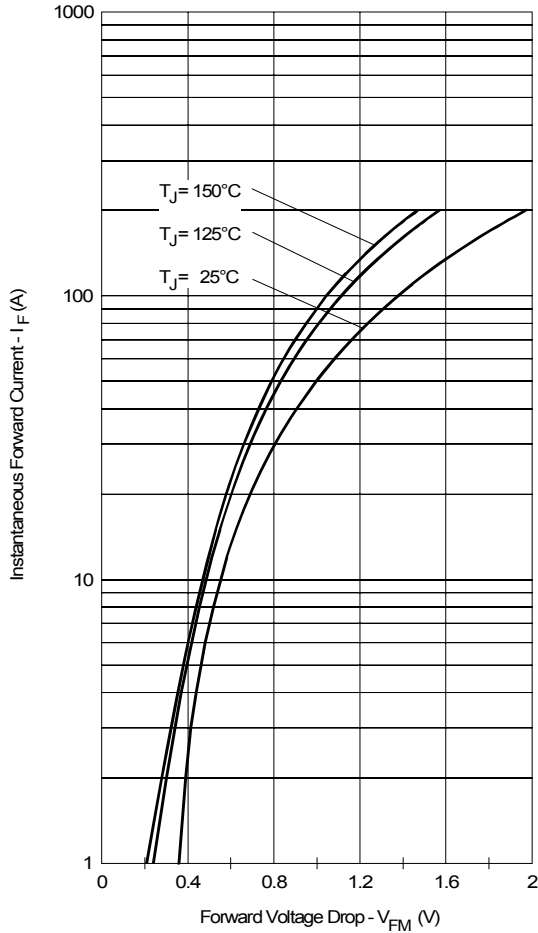


Fig. 1 - Maximum Forward Voltage Drop Characteristics

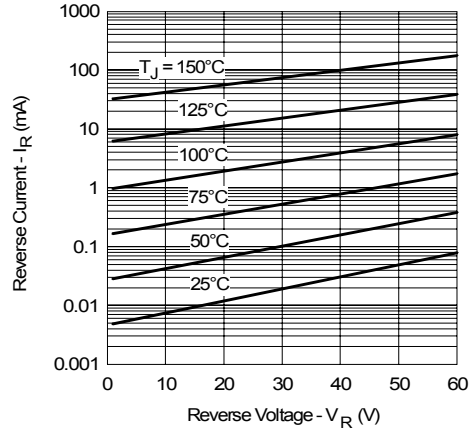


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

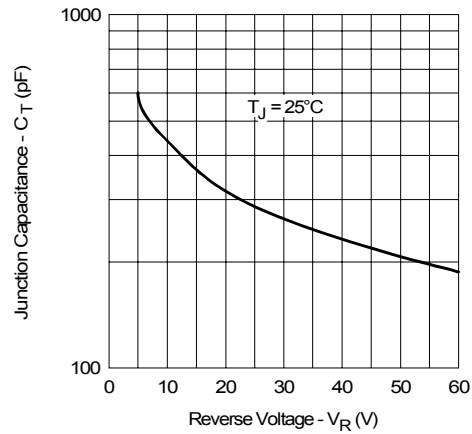


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

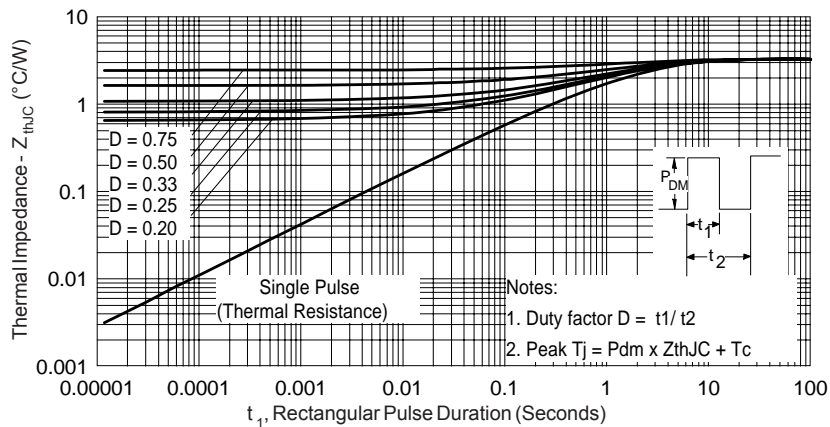


Fig. 4 - Maximum Thermal Impedance Z_{thJC} Characteristics

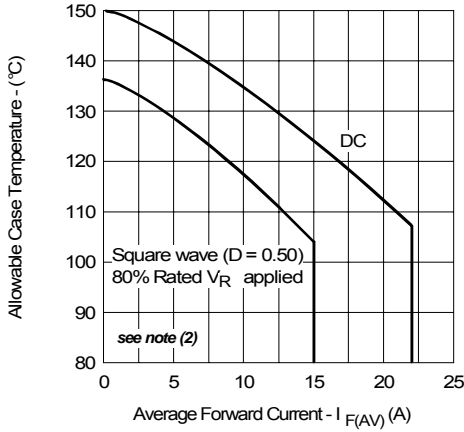


Fig. 5 - Maximum Allowable Case Temperature Vs. Average Forward Current

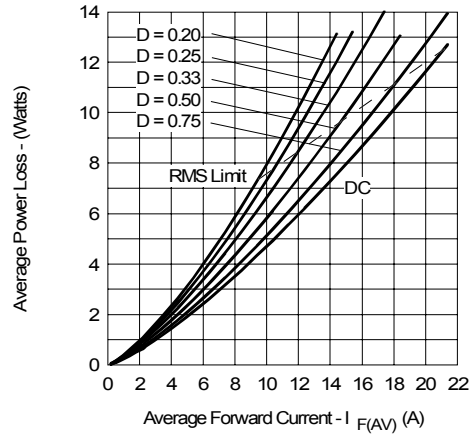


Fig. 6 - Forward Power Loss Characteristics

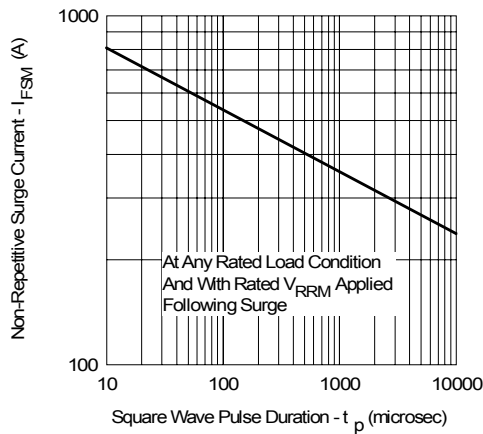


Fig. 7 - Maximum Non-Repetitive Surge Current

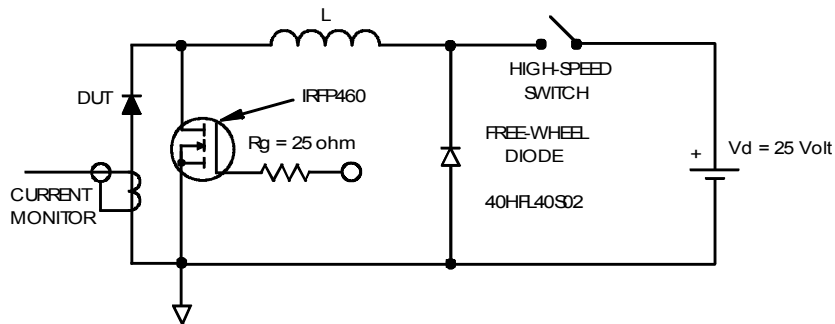




Fig. 8 - Unclamped Inductive Test Circuit

(2) Formula used: $T_c = T_j - (Pd + Pd_{REV}) \times R_{thJC}$;

Pd = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);

Pd_{REV} = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = 80\%$ rated V_R

Outline Table

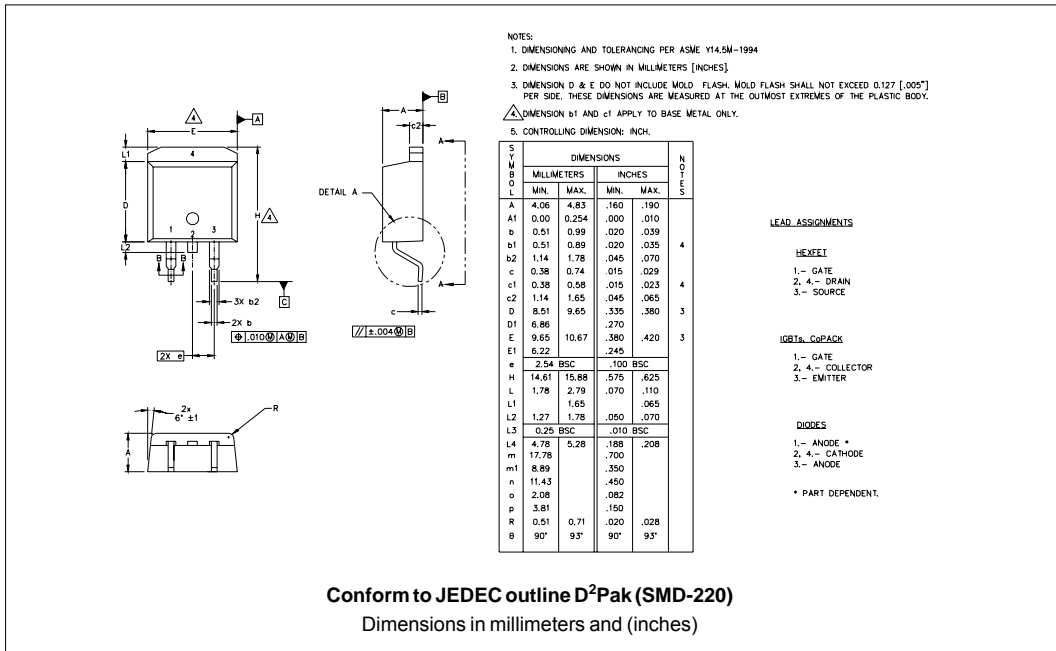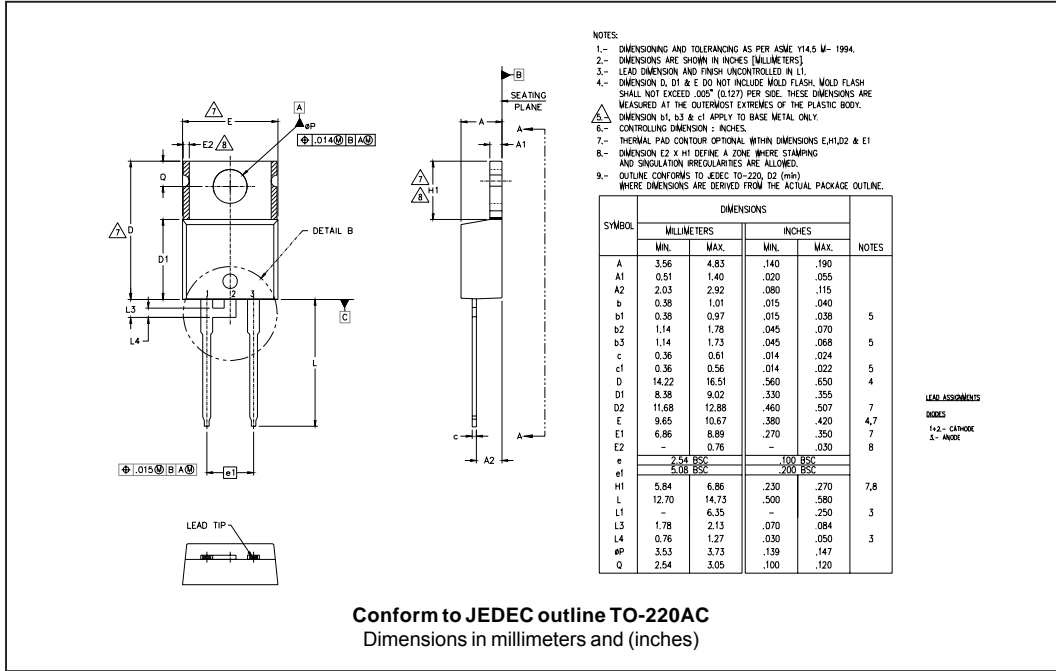

Part Marking Information

TO-220AC

EXAMPLE: THIS IS A 15TQ060
LOT CODE 1789
ASSEMBLED ON WW 19, 2001
IN THE ASSEMBLY LINE "C"

PART NUMBER

DATE CODE
YEAR 1 = 2001
WEEK 19
LINE C

D²Pak

EXAMPLE: THIS IS A 15TQ060S
LOT CODE 8024
ASSEMBLED ON WW 02, 2000

PART NUMBER

DATE CODE
YEAR 0 = 2000
WEEK 02
LINE C

Tape & Reel Information

SECTION Y-Y

| | |
|----------------|---------------|
| A _o | 10.50 +/- 0.1 |
| B _o | 15.80 +/- 0.1 |
| B2 | 10.25 +/- 0.1 |
| K _o | 4.90 +/- 0.1 |
| F | 11.50 +/- 0.1 |
| P ₁ | 16.00 +/- 0.1 |
| W | 24.00 +/- 0.3 |

NOTES:

- 1.0 10 SPROCKET HOLE PITH CUMULATIVE TOLERANCE ±0.2
- 2.0 CAMBER NOT TO EXCEED 1mm in 100mm
- 3.0 MATERIAL: CONDUCTIVE BLACK STYRENE ALLOY
- 4.0 K_o MEASURED FROM A PLANE ON THE INSIDE BOTTOM OF THE POCKET TO THE TOP SURFACE OF THE CARRIER
- 5.0 MEASURED FROM CENTRELINE OF SPROCKET HOLE TO CENTRELINE OF POCKET
- 6.0 VENDOR: (OPTIONAL)
- 7.0 MUST ALSO MEET REQUIREMENTS OF EIA STANDAR #EIA-481A TAPING OF SURFACE MOUNT COMPONENTS FOR AUTOMATIC PLACEMENT
- 8.0 SURFACE RESISTIVITY OF MOLDED MATL. MUST MEASURE LESS OR EQUAL TO 10⁶ OHMS PER SQUARE. MEASURED IN ACCORDANCE TO PROCEDURE GIVEN IN ASTM D-257 & ASTM D-991
- 9.0 TOTAL LENGTH PER REEL MUST BE 45 METERS
- 10.0 © CRITICAL

Dimensions in millimeters and (inches)

Ordering Information Table

| Device Code | |
|---|---|
| 15 | T |
| ① | ② |
| Q | 060 |
| ③ | ④ |
| S | - |
| ⑤ | ⑥ |
| 1 | - Current Rating (15 = 15A) |
| 2 | - Package T=TO-220 |
| 3 | - Schottky "Q" Series |
| 4 | - Voltage Rating (060 = 60V) |
| 5 | - • none = TO-220 • S = D ² Pak |
| 6 | - • none = Standard Production • PbF = Lead-Free |
| Tube Standard Pack Quantity : 50 pieces | |

Data and specifications subject to change without notice.
 This product has been designed and qualified for Industrial Level.
 Qualification Standards can be found on IR's Web site.