

SMPS MOSFET

IRF7459UPbF

HEXFET® Power MOSFET



Applications

- High Frequency DC-DC Isolated Converters with Synchronous Rectification for Telecom and Industrial use
- High Frequency Buck Converters for Computer Processor Power
- Lead-Free

| | | |
|------------------------|-------------------------------|----------------------|
| V_{DSS} | R_{DS(on)} max | I_D |
| 20V | 9.0mΩ | 12A |

Benefits

- Ultra-Low Gate Impedance
- Very Low R_{DS(on)} at 4.5V V_{GS}
- Fully Characterized Avalanche Voltage and Current

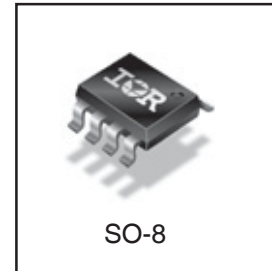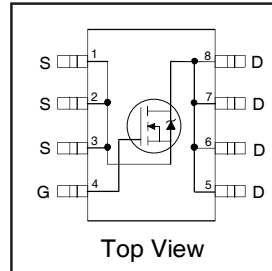

Absolute Maximum Ratings

| Symbol | Parameter | Max. | Units |
|--|---|--------------|-------|
| V _{DS} | Drain-Source Voltage | 20 | V |
| V _{GS} | Gate-to-Source Voltage | ± 12 | V |
| I _D @ T _A = 25°C | Continuous Drain Current, V _{GS} @ 10V | 12 | A |
| I _D @ T _A = 70°C | Continuous Drain Current, V _{GS} @ 10V | 10 | |
| I _{DM} | Pulsed Drain Current ^① | 100 | |
| P _D @ T _A = 25°C | Maximum Power Dissipation ^③ | 2.5 | W |
| P _D @ T _A = 70°C | Maximum Power Dissipation ^③ | 1.6 | W |
| | Linear Derating Factor | 0.02 | W/°C |
| T _J , T _{STG} | Junction and Storage Temperature Range | -55 to + 150 | °C |

Thermal Resistance

| Symbol | Parameter | Typ. | Max. | Units |
|------------------|----------------------------------|------|------|-------|
| R _{θJL} | Junction-to-Drain Lead | — | 20 | °C/W |
| R _{θJA} | Junction-to-Ambient ^② | — | 50 | |

Notes ① through ④ are on page 8

IRF7459UPbF

International
IR Rectifier

Static @ T_J = 25°C (unless otherwise specified)

| | Parameter | Min. | Typ. | Max. | Units | Conditions |
|--|--------------------------------------|------|-------|------|-------|---|
| V _{(BR)DSS} | Drain-to-Source Breakdown Voltage | 20 | — | — | V | V _{GS} = 0V, I _D = 250μA |
| ΔV _{(BR)DSS} /ΔT _J | Breakdown Voltage Temp. Coefficient | — | 0.024 | — | V/°C | Reference to 25°C, I _D = 1mA |
| R _{DS(on)} | Static Drain-to-Source On-Resistance | — | 6.7 | 9.0 | mΩ | V _{GS} = 10V, I _D = 12A ③ |
| | | — | 8.0 | 11 | | V _{GS} = 4.5V, I _D = 9.6A ③ |
| | | — | 11 | 22 | | V _{GS} = 2.8V, I _D = 6.0A ③ |
| V _{GS(th)} | Gate Threshold Voltage | 0.6 | — | 2.0 | V | V _{DS} = V _{GS} , I _D = 250μA |
| I _{DSS} | Drain-to-Source Leakage Current | — | — | 20 | μA | V _{DS} = 16V, V _{GS} = 0V |
| | | — | — | 100 | | V _{DS} = 16V, V _{GS} = 0V, T _J = 125°C |
| I _{GSS} | Gate-to-Source Forward Leakage | — | — | 200 | nA | V _{GS} = 12V |
| | Gate-to-Source Reverse Leakage | — | — | -200 | | V _{GS} = -12V |


Dynamic @ T_J = 25°C (unless otherwise specified)

| Symbol | Parameter | Min. | Typ. | Max. | Units | Conditions |
|---------------------|---------------------------------|------|------|------|-------|--|
| g _{fs} | Forward Transconductance | 32 | — | — | S | V _{DS} = 16V, I _D = 9.6A |
| Q _g | Total Gate Charge | — | 23 | 35 | nC | I _D = 9.6A |
| Q _{gs} | Gate-to-Source Charge | — | 6.6 | 10 | | V _{DS} = 10V |
| Q _{gd} | Gate-to-Drain ("Miller") Charge | — | 6.3 | 9.5 | | V _{GS} = 4.5V ③ |
| Q _{oss} | Output Gate Charge | — | 17 | 26 | | V _{GS} = 0V, V _{DS} = 10V |
| t _{d(on)} | Turn-On Delay Time | — | 10 | — | ns | V _{DD} = 10V, |
| t _r | Rise Time | — | 4.5 | — | | I _D = 9.6A |
| t _{d(off)} | Turn-Off Delay Time | — | 20 | — | | R _G = 1.8Ω |
| t _f | Fall Time | — | 5.0 | — | | V _{GS} = 4.5V ③ |
| C _{iss} | Input Capacitance | — | 2480 | — | pF | V _{GS} = 0V |
| C _{oss} | Output Capacitance | — | 1030 | — | | V _{DS} = 10V |
| C _{rss} | Reverse Transfer Capacitance | — | 130 | — | | f = 1.0MHz |

Avalanche Characteristics

| | Parameter | Typ. | Max. | Units |
|-----------------|--------------------------------|------|------|-------|
| E _{AS} | Single Pulse Avalanche Energy② | — | 290 | mJ |
| I _{AR} | Avalanche Current① | — | 12 | A |

Diode Characteristics

| Symbol | Parameter | Min. | Typ. | Max. | Units | Conditions |
|-----------------|--|------|------|------|-------|--|
| I _S | Continuous Source Current (Body Diode) | — | — | 2.5 | A | MOSFET symbol showing the integral reverse p-n junction diode.  |
| I _{SM} | Pulsed Source Current (Body Diode) ① | — | — | 100 | | |
| V _{SD} | Diode Forward Voltage | — | 0.84 | 1.3 | V | T _J = 25°C, I _S = 9.6A, V _{GS} = 0V ③ |
| | | — | 0.69 | — | | T _J = 125°C, I _S = 9.6A, V _{GS} = 0V |
| t _{rr} | Reverse Recovery Time | — | 70 | 105 | ns | T _J = 25°C, I _F = 9.6A, V _R = 15V |
| Q _{rr} | Reverse Recovery Charge | — | 70 | 105 | nC | di/dt = 100A/μs ③ |
| t _{rr} | Reverse Recovery Time | — | 70 | 105 | ns | T _J = 125°C, I _F = 9.6A, V _R = 15V |
| Q _{rr} | Reverse Recovery Charge | — | 75 | 113 | nC | di/dt = 100A/μs ③ |

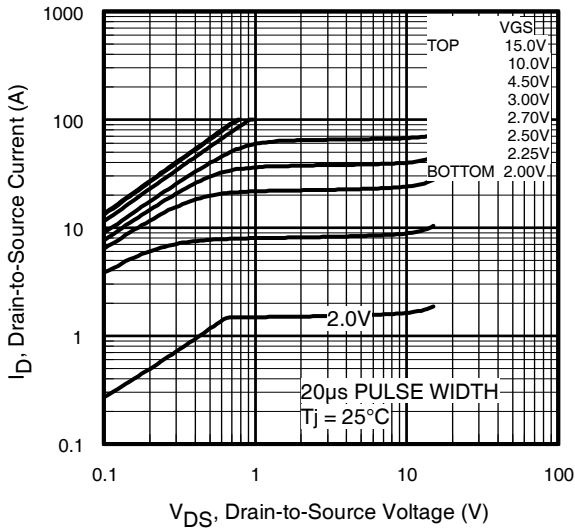


Fig 1. Typical Output Characteristics

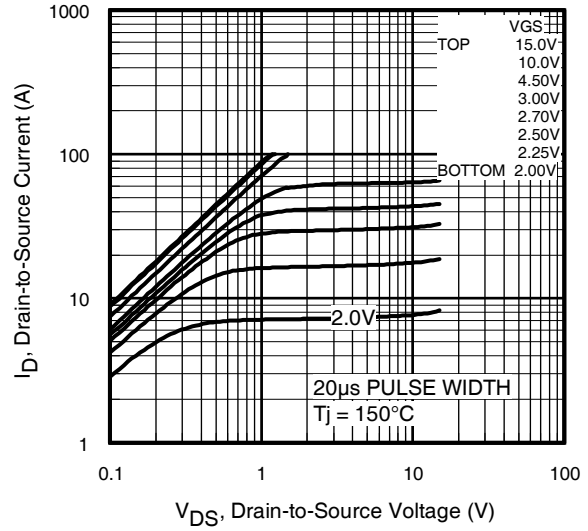


Fig 2. Typical Output Characteristics

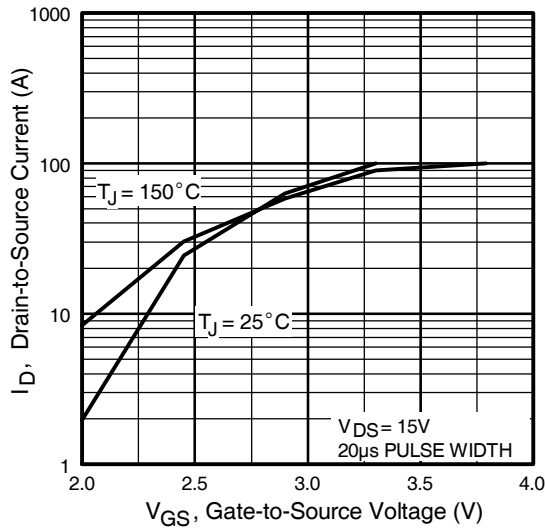


Fig 3. Typical Transfer Characteristics

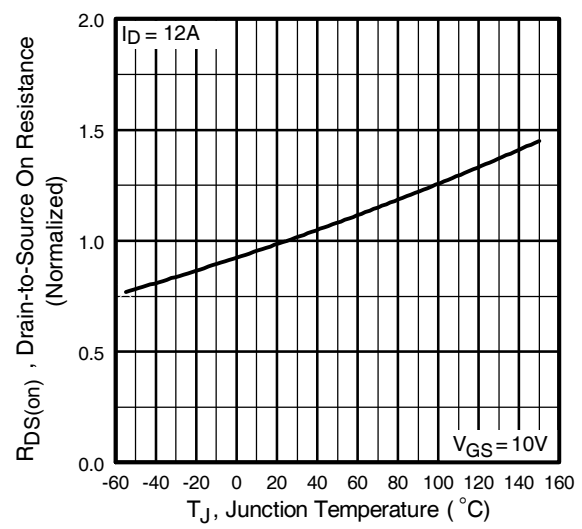


Fig 4. Normalized On-Resistance Vs. Temperature

IRF7459UPbF

International
IR Rectifier

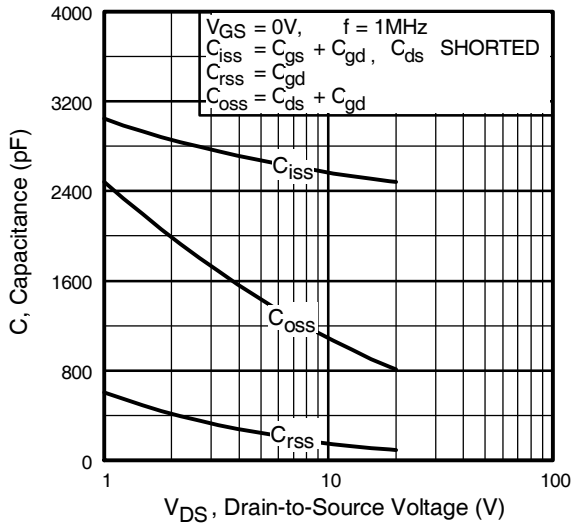


Fig 5. Typical Capacitance Vs. Drain-to-Source Voltage

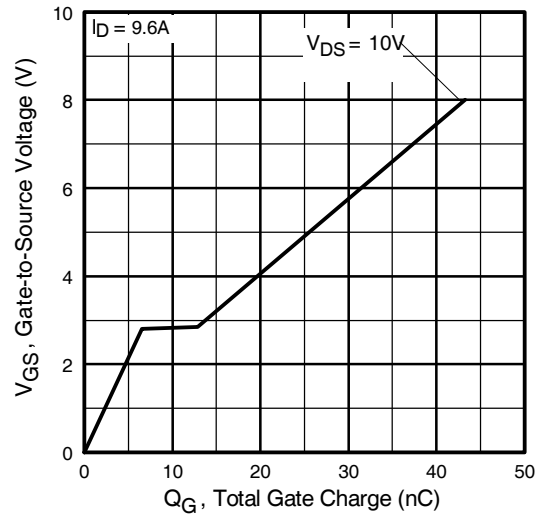


Fig 6. Typical Gate Charge Vs. Gate-to-Source Voltage

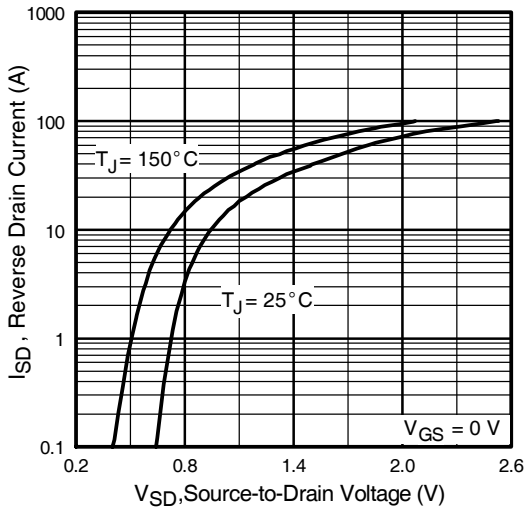


Fig 7. Typical Source-Drain Diode Forward Voltage

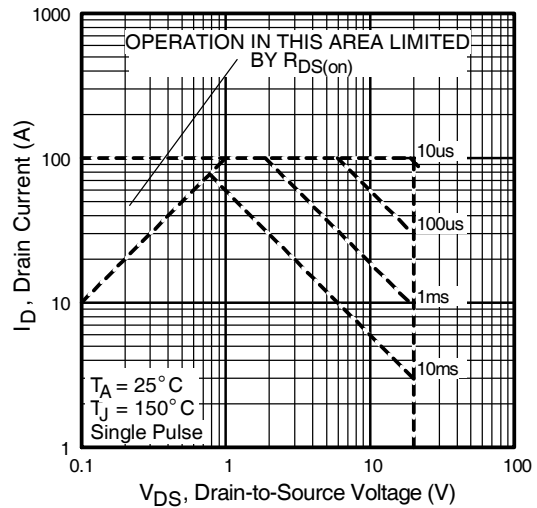


Fig 8. Maximum Safe Operating Area

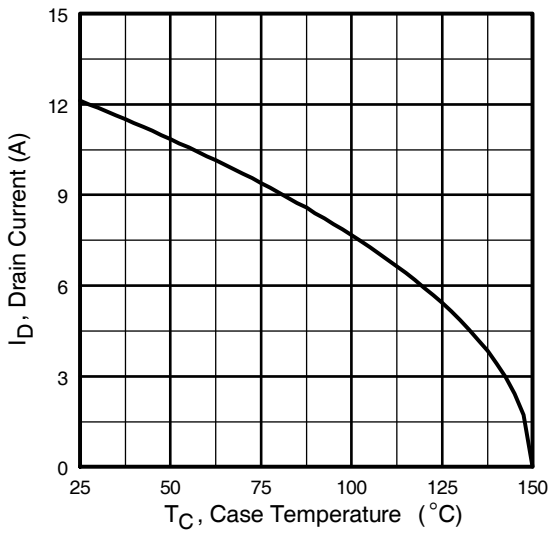


Fig 9. Maximum Drain Current Vs. Case Temperature

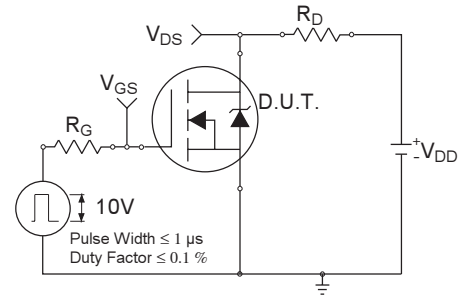


Fig 10a. Switching Time Test Circuit

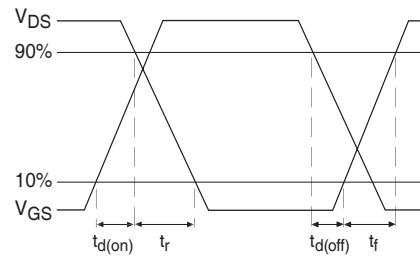


Fig 10b. Switching Time Waveforms

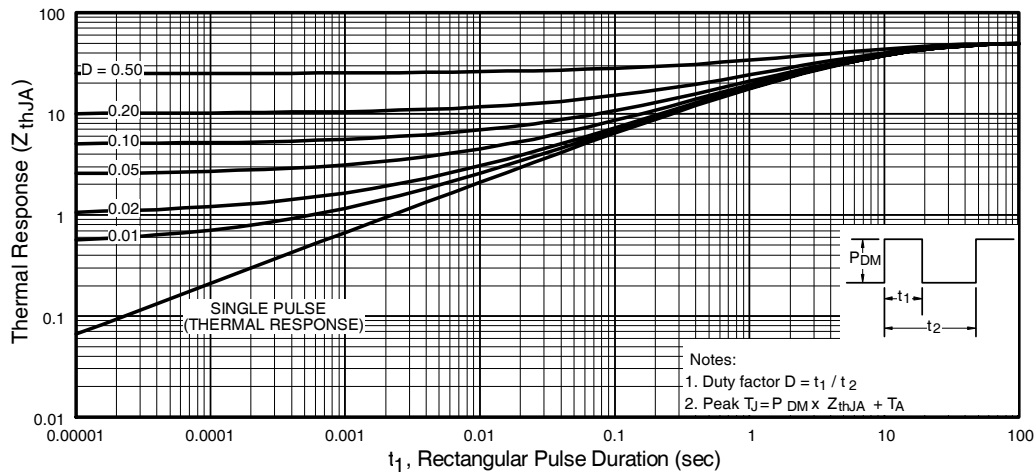


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

IRF7459UPbF

International
IR Rectifier

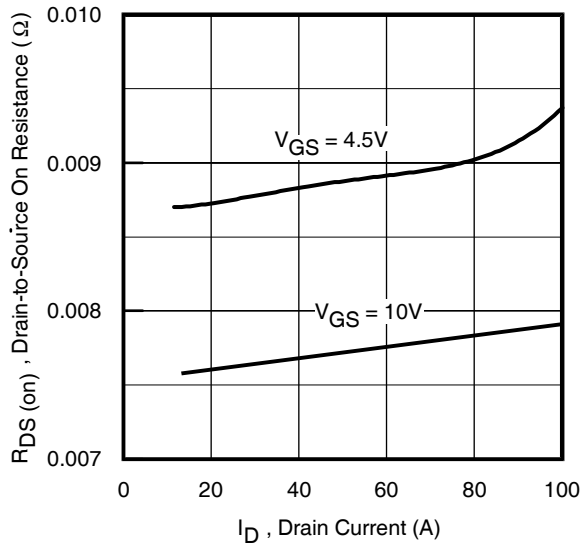


Fig 12. On-Resistance Vs. Drain Current

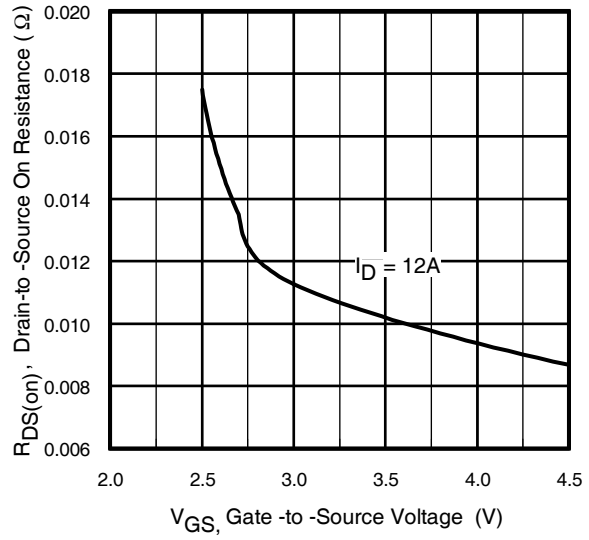


Fig 14. On-Resistance Vs. Gate Voltage

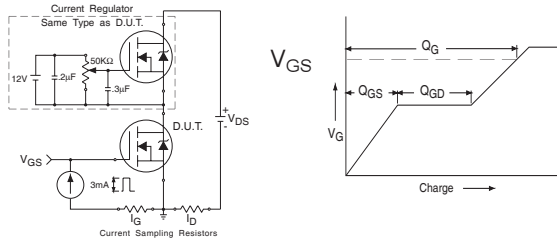


Fig 13a&b. Basic Gate Charge Test Circuit and Waveform

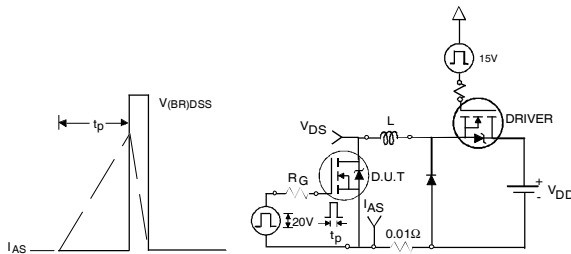


Fig 14a&b. Unclamped Inductive Test circuit and Waveforms


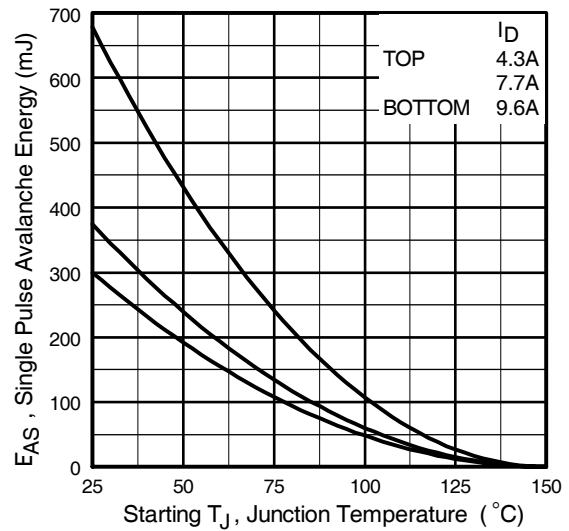




Fig 14c. Maximum Avalanche Energy Vs. Drain Current

SO-8 Package Outline

Dimensions are shown in millimeters (inches)

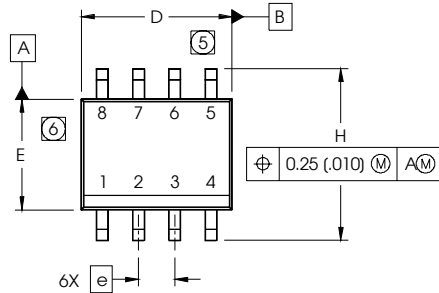


| DIM | INCHES | | MILLIMETERS | |
|-----|------------|-------|-------------|------|
| | MIN | MAX | MIN | MAX |
| A | .0532 | .0688 | 1.35 | 1.75 |
| A1 | .0040 | .0098 | 0.10 | 0.25 |
| b | .013 | .020 | 0.33 | 0.51 |
| c | .0075 | .0098 | 0.19 | 0.25 |
| D | .189 | .1968 | 4.80 | 5.00 |
| E | .1497 | .1574 | 3.80 | 4.00 |
| e | .050 BASIC | | 1.27 BASIC | |
| e1 | .025 BASIC | | 0.635 BASIC | |
| H | .2284 | .2440 | 5.80 | 6.20 |
| K | .0099 | .0196 | 0.25 | 0.50 |
| L | .016 | .050 | 0.40 | 1.27 |
| y | 0° | 8° | 0° | 8° |

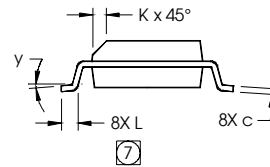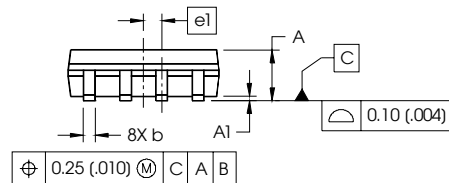

NOTES:

1. DIMENSIONING & TOLERANCING PER ASME Y14.5M-1994.
2. CONTROLLING DIMENSION: MILLIMETER
3. DIMENSIONS ARE SHOWN IN MILLIMETERS (INCHES).
4. OUTLINE CONFORMS TO JEDEC OUTLINE MS-012AA.
- ⑤ DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS. MOLD PROTRUSIONS NOT TO EXCEED 0.15 (.006).
- ⑥ DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS. MOLD PROTRUSIONS NOT TO EXCEED 0.25 (.010).
- ⑦ DIMENSION IS THE LENGTH OF LEAD FOR SOLDERING TO ASUBSTRATE.


FOOTPRINT

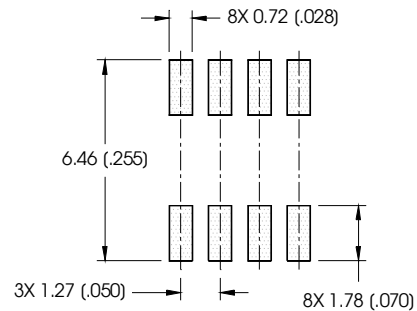

SO-8 Part Marking

EXAMPLE: THIS IS AN IRF7832U (MOSFET)

INTERNATIONAL
RECTIFIER
LOGO

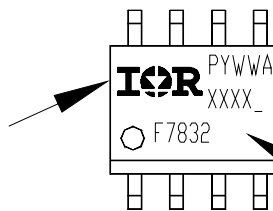

DATE CODE (YWW)

P = DESIGNATES LEAD - FREE PRODUCT (OPTIONAL)

Y = LAST DIGIT OF THE YEAR

WW = WEEK

A = ASSEMBLY SITE CODE

LOT CODE


PART NUMBER

IRF7459UPbF


International
IR Rectifier

SO-8 Tape and Reel

Dimensions are shown in millimeters (inches)

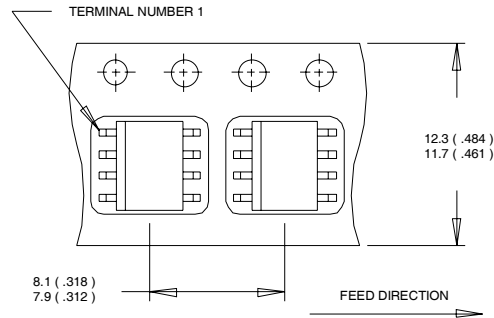

- NOTES:
1. CONTROLLING DIMENSION : MILLIMETER.
 2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS(INCHES).
 3. OUTLINE CONFORMS TO EIA-481 & EIA-541.

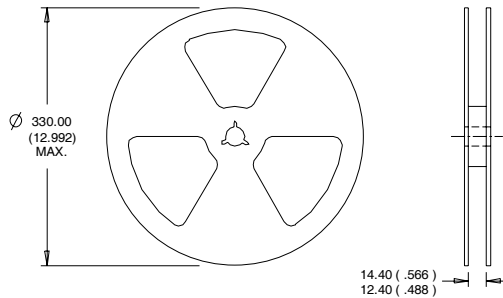

- NOTES:
1. CONTROLLING DIMENSION : MILLIMETER.
 2. OUTLINE CONFORMS TO EIA-481 & EIA-541.

Notes:

- ① Repetitive rating; pulse width limited by max. junction temperature.
- ② Starting $T_J = 25^\circ\text{C}$, $L = 6.3\text{mH}$
 $R_G = 25\Omega$, $I_{AS} = 9.6\text{A}$.
- ③ Pulse width $\leq 300\mu\text{s}$; duty cycle $\leq 2\%$.
- ④ When mounted on 1 inch square copper board, $t < 10$ sec

Data and specifications subject to change without notice.
This product has been designed and qualified for the Consumer market.
Qualifications Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903

Visit us at www.irf.com for sales contact information. 09/2006

www.irf.com