

G5 HVIC New Product Offering: IRS210(9,94)

Energy Saving Products
International Rectifier
El Segundo, CA

Content

- HVIC Evolution
- Process Comparison: HVIC & G5 HVIC
- Adopting G5 HVIC: IRS210(9,94)
- G5 HVIC Tools
- Q&A



HVIC Evolution

International Rectifier has invested (and continues to invest) in a new IC process that will support the continued improvement of our HVICs and allow these improvements to be realized while keeping price under control. This new process is referred to as G5 HVIC.


The adoption of a new IC process as an existing IC process approaches its limits is part of the natural progression in IC evolution. The G5 HVIC process allows improvements in device capabilities, tighter specifications, temperature stability, functions/\$, and the integration of previously unavailable features at an attractive price point.

Two categories of products have emerged from this new technology; G5 HVIC new products, and G5 HVIC replacement products (to replace existing HVIC products).

Process Comparison: HVIC & G5 HVIC



Process Comparison: HVIC & G5 HVIC

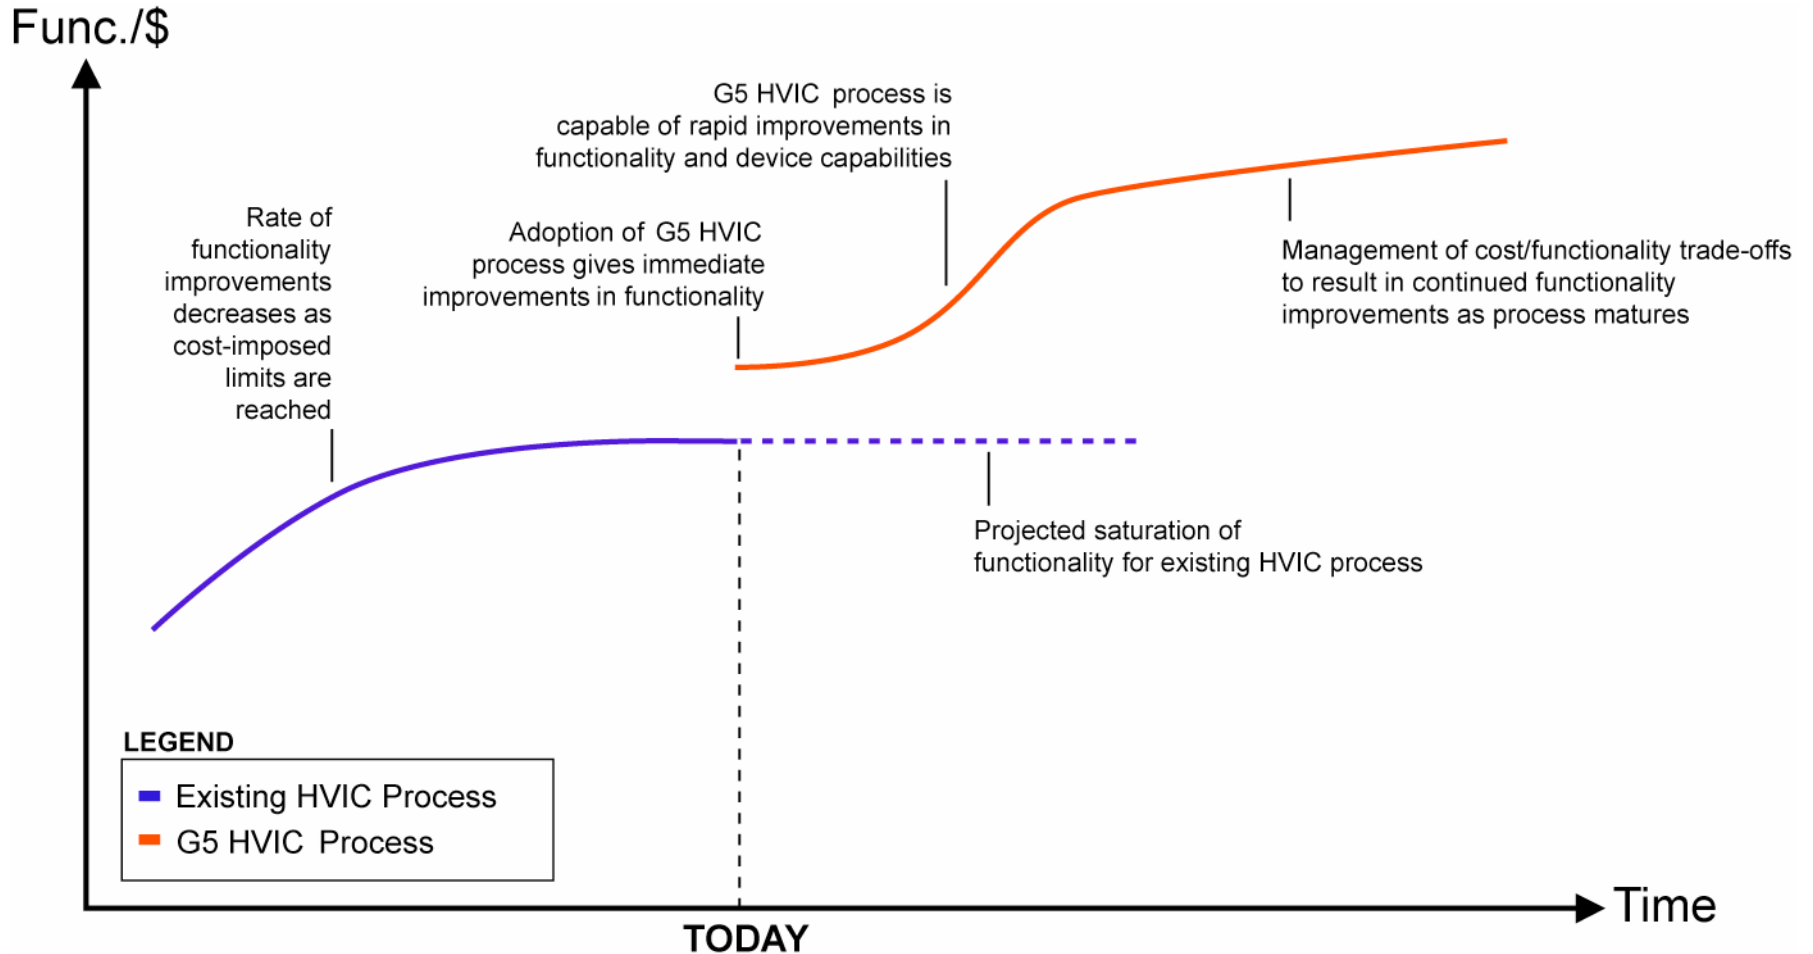

Process Comparison: HVIC & G5 HVIC

- **G5 HVIC products are grouped in two categories**
 - New products (e.g., with integrated bootstrap functionality, PFC, brake drive, etc.)
 - Upgraded version of existing HVICs (e.g., improved input filters, etc.)
- **G5 HVIC replacement products are pin-to-pin compatible with their predecessors**
- **Process identification**
 - IRSxxxx part numbers (G5 HVIC technology)
 - IR2(0,1,3,5)xx & IR44xx part numbers (existing HVIC technology)

Adopting G5 HVIC: IRS210(9,94)

Immediate improvements in functionality/\$

Capable of rapid improvements in functionality & capability

Previously unavailable features integrated at attractive price

- Improved clamping structure provides additional spike protection
- Higher output sink/source capability
- Improved matching time
- Improved temperature stability
- Higher signal to noise rejection at input and improved logic threshold values
- Improved DC operation under negative V_s conditions
- Pin-to-pin compatible
IR2109(S): IRS2109(S),
IRS2004(S), & IRS2104(S);
IR21094(S): IRS21094(S)

Adopting G5 HVIC: IRS210(9,94)

	(units)	IRS2003	IRS2004	IRS2103	IRS2104	IRS2108	IRS21084	IR2109	IRS2109	IR21094	IRS21094	IRS2111	IRS2183	IRS21834	IRS2184	IRS21844	IRS2302	IRS2304	IRS2308		
Offset voltage	V	200	200	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	
Matched prop. delay		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
Programmable DT	-	No	No	No	No	No	Yes	No	No	Yes	Yes	No	No	Yes	No	Yes	No	No	No	No	
SD Pin		No	Yes	No	Yes	No	No	Yes	Yes	Yes	Yes	No	No	No	Yes	Yes	Yes	No	No	No	
INPUT LOGIC																					
Logic compatibility	V	3,3, 5, 15	3,3, 5, 15	3,3, 5, 15	3,3, 5, 15	3,3, 5, 15	3,3, 5, 15	3,3, 5, 15	3,3, 5, 15	3,3, 5, 15	3,3, 5, 15	10-20	3,3, 5	3,3, 5	3,3, 5	3,3, 5	3,3, 5, 15	3,3, 5, 15	3,3, 5, 15	3,3, 5, 15	
HIN, LIN/N		Yes		Yes									Yes	Yes							
HIN/N, LIN						Yes	Yes														
HIN, LIN																			Yes	Yes	
IN			Yes		Yes			Yes	Yes	Yes	Yes	Yes			Yes	Yes	Yes				
OUTPUT																					
V _{out}	V	10-20	10-20	10-20	10-20	10-20	10-20	10-20	10-20	10-20	10-20	10-20	10-20	10-20	10-20	10-20	10-20	10-20	5-20	10-20	10-20
I _{o+}	mA	290	290	290	290	290	290	200	290	200	290	290	1900	1900	1900	1900	1900	290	290	290	
I _{o-}		600	600	600	600	600	600	350	600	350	600	600	2300	2300	2300	2300	2300	600	600	600	
UVLO																					
V _{BSUV+}	V	-	-	-	-	8.9	8.9	8.9	8.9	8.9	8.9	8.6	8.9	8.9	8.9	8.9	8.9	4.1	8.9	8.9	
V _{BSUV-}		-	-	-	-	8.2	8.2	8.2	8.2	8.2	8.2	8.2	8.2	8.2	8.2	8.2	8.2	3.8	8.2	8.2	
V _{BSUVH}		-	-	-	-	0.7	0.7	0.7	0.7	0.7	0.7	-	0.7	0.7	0.7	0.7	0.7	0.3	0.7	0.7	
V _{CCUV+}		8.9	8.9	8.9	8.9	8.9	8.9	8.9	8.9	8.9	8.9	8.6	8.9	8.9	8.9	8.9	8.9	4.1	8.9	8.9	
V _{CCUV-}		8.2	8.2	8.2	8.2	8.2	8.2	8.2	8.2	8.2	8.2	8.2	8.2	8.2	8.2	8.2	8.2	3.8	8.2	8.2	
V _{CCUVH}		-	-	-	-	0.7	0.7	0.7	0.7	0.7	0.7	-	0.7	0.7	0.7	0.7	0.7	0.3	0.7	0.7	
TIMING																					
t _{on}	ns	680	680	680	680	220	220	750	750	750	750	750	180	180	680	680	750	150	220		
t _{off}		150	150	150	150	200	200	200	200	200	200	200	150	220	220	270	270	200	150	200	
t _{sd}			160	160	160	160			200	200	200	200				180	180	200			
t _r		70	70	70	70	100	100	150	100	150	100	75	40	40	40	40	40	100	70	100	
t _f		35	35	35	35	35	35	50	35	50	35	35	20	20	20	20	20	35	35	35	
MT		60 (max)	60 (max)	60 (max)	60 (max)			70 (max)	70 (max)	70 (max)	70 (max)	30	35 (max)	35 (max)	90/40	90/40		50 (max)			
DT		520	520	520	520	540	540-5000	540	540	540-5000	540-5000	650	400	400-5000	400	400-5000	540	100	540	540	
MDT						60 (max)	60-600	60 (max)	60 (max)	60-600	60-600		50	50-600	50	50-600	60 (max)			60 (max)	

Half-Bridge Driver Comparison

