International Rectifier

10BQ015

SCHOTTKY RECTIFIER

1 Amp

$$I_{F(AV)} = 1 \text{ Amp}$$
 $V_R = 15V$


Major Ratings and Characteristics

Characteristics	10BQ015	Units
I _{F(AV)} Rectangular waveform	1.0	А
V _{RRM}	15	V
I _{FSM} @tp=5μssine	140	А
V _F @1.0 Apk, T _J =125°C	0.32	٧
T _J range	- 55 to 125	°C

Description/ Features

The 10BQ015 surface mount Schottky rectifier has been designed for applications requiring low forward drop and very small foot prints on PC boards. The proprietary barrier technology allows for reliable operation up to 125°C junction temperature. Typical applications are in disk drives, switching power supplies, converters, free-wheeling diodes, battery charging, and reverse battery protection.

- 125°C T_J operation ($V_R < 5V$)
- Optimized for OR-ing applications
- Ultra low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance

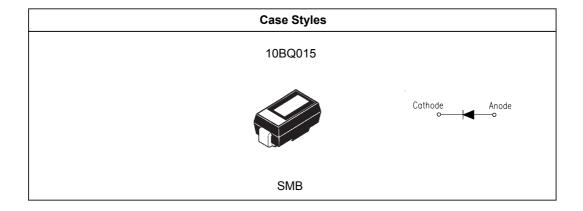

International Rectifier

Voltage Ratings

	Part number	10BQ015
V _R	Max. DC Reverse Voltage (V)	15
V _{RWI}	Max. Working Peak Reverse Voltage (V)	25

Absolute Maximum Ratings

	Parameters	10BQ	Units	Conditions		
I _{F(AV)}	Max. Average Forward Current *See Fig. 5	1.0	Α	50% duty cycle @ T _L = 84 °C, re	= 84 °C, rectangular wave form.	
I _{FSM}	Max. Peak One Cycle Non-Repetitive	140	Α	5μs Sine or 3μs Rect. pulse	Following any rated load condition and with rated V _{RRM} applied	
	Surge Current * See Fig. 7	40	^`	10ms Sine or 6ms Rect. pulse		
E _{AS}	Non-Repetitive Avalanche Energy	1.0	mJ	$T_J = 25 ^{\circ}\text{C}, I_{AS} = 1A, L = 2\text{mH}$		
I _{AR}	Repetitive Avalanche Current	1.0	Α	Current decaying linearly to zero in 1 μ sec Frequency limited by T_J max. V_A = 1.5 x V_R typical		

Electrical Specifications

	Parameters		10BQ	Units		Conditions
V _{FM}	Max. Forward Voltage Drop	(1)	0.35	V	@ 1.0A	T = 25 °C
	* See Fig. 1		0.44	V	@ 2.0A	$T_J = 25 ^{\circ}\text{C}$
			0.32	V	@ 1.0A	T ₁ = 125 °C
			0.40	V	@ 2.0A	1 _J = 125 C
I _{RM}	Max. Reverse Leakage Current	(1)	0.5	mA	T _J = 25 °C	V = rated V
	* See Fig. 2		12	mA	T _J = 100 °C	$V_R = \text{rated } V_R$
V _{F(TO}	Threshold Voltage		-	V	$T_J = T_J \text{ max.}$	
r _t	Forward Slope Resistance		-	mΩ		
Ст	Typical Junction Capacitance		390	pF	$V_R = 5V_{DC}$, (test signal range 100KHz to 1MHz) 25°C	
Ls	Typical Series Inductance		2.0	nH	Measured lead to lead 5mm from package body	
dv/dt	Max. Voltage Rate of Change		10000	V/µs	(Rated V _R)	

⁽¹⁾ Pulse Width < 300µs, Duty Cycle < 2%

Thermal-Mechanical Specifications

	Parameters	10BQ	Units	Conditions		
T _J	Max. Junction Temperature Range (*)	-55 to 125	°C			
T _{stg}	Max. Storage Temperature Range	-55 to 150	°C			
R _{thJL}	Max. Thermal Resistance Junction to Lead (**)	36	°C/W	DC operation (See Fig. 4)		
R _{thJA}	Max. Thermal Resistance Junction to Ambient	80	°C/W	DC operation		
wt	Approximate Weight	0.10 (0.003)	g (oz.)			
	Case Style	SMB		Similar to DO-214AA		
	Device Marking	IR1C				

 $[\]frac{\text{(*)}}{\text{dTj}} < \frac{\text{dPtot}}{\text{Rth(j-a)}} < \frac{1}{\text{Rth(j-a)}} \text{ thermal runaway condition for a diode on its own heatsink}$

^(**) Mounted 1 inch square PCB

Bulletin PD-2.396 rev. I 07/04

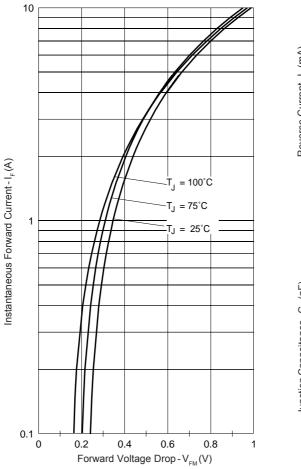


Fig. 1 - Max. Forward Voltage Drop Characteristics




Fig. 2-Typical Values Of Reverse Current Vs. Reverse Voltage




Fig. 3-Typical Junction Capacitance
Vs. Reverse Voltage


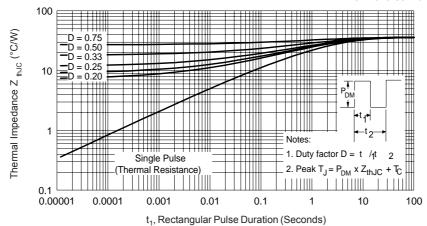



Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)



Average Forward Current - IF_(AV) (A)


Fig. 5 - Max. Allowable Case Temperature

Vs. Average Forward Current



Average Forward Current - $IF_{(AV)}(A)$

Fig. 6 - Forward Power Loss Characteristics




Square Wave Pulse Duration - t_p (microsec) Fig. 7 - Max. Non-Repetitive Surge Current

 $\begin{aligned} \textbf{(2)} \;\; &\text{Formula used: } \textbf{T}_{\text{C}} = \textbf{T}_{\text{J}} - (\textbf{Pd} + \textbf{Pd}_{\text{REV}}) \, \textbf{x} \, \textbf{R}_{\text{thJC}}; \\ &\text{Pd} = \textbf{Forward Power Loss} = \textbf{I}_{\text{F(AV)}} \textbf{x} \, \textbf{V}_{\text{FM}} \textcircled{@} \, (\textbf{I}_{\text{F(AV)}} / \textbf{D}) \;\; (\text{see Fig. 6}); \\ &\text{Pd}_{\text{REV}} = \textbf{Inverse Power Loss} = \textbf{V}_{\text{R1}} \, \textbf{x} \, \textbf{I}_{\text{R}} \, (\textbf{1} - \textbf{D}); \, \textbf{I}_{\text{R}} \textcircled{@} \, \textbf{V}_{\text{R1}} = 80\% \, \text{rated} \, \textbf{V}_{\text{R}} \end{aligned}$


10BQ015

Bulletin PD-2.396 rev. I 07/04

Outline Table

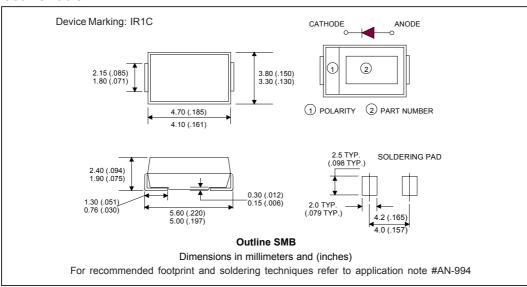


Marking & Identification

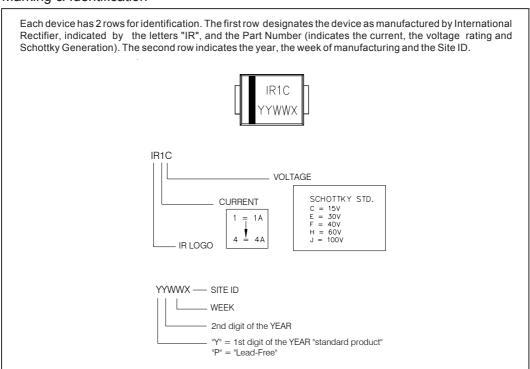


Bulletin PD-2.396 rev. I 07/04

Tape & Reel Information

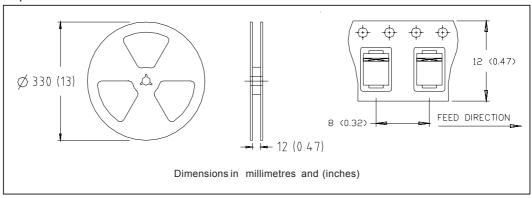

Ordering Information Table

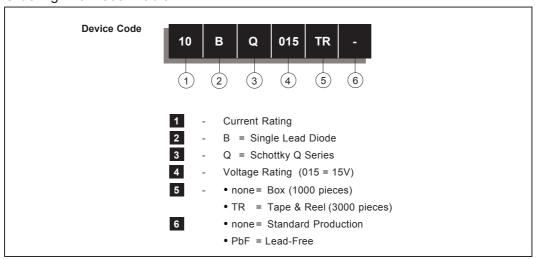

Data and specifications subject to change without notice. This product has been designed and qualified for Industrial Level.

Qualification Standards can be found on IR's Web site.



IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 07/04