


IR MOSFET™

## **Features**

- Advanced Process Technology
- · Dynamic dv/dt Rating
- 175°C Operating Temperature
- Fast Switching
- Fully Avalanche Rated
- Lead-Free



V <sub>(BR)DSS</sub>	100V	
R <sub>DS(on)</sub> max.	0.036Ω	
I <sub>D</sub>	42A	



IR MOSFET™ technology from Infineon utilizes advanced processing techniques to achieve extremely low on-resistance per silicon area. This benefit, combined with the fast switching speed and rugged device design that IR MOSFET™ devices are well known for, provides the designer with an extremely efficient and reliable device for use in a wide variety of applications.

The TO-247 package is preferred for commercial-industrial applications where higher power levels preclude the use of TO-220 devices. The TO-247 is similar but superior to the earlier TO-218 package because of its isolated mounting hole.



G	D	S
Gate	Drain	Source

Page part number	Pookogo Typo	Standard Pack Form Quantity		Orderable Part Number
Base part number	Package Type			Orderable Part Number
IRFP150MPbF	TO-247AD	Tube	25	IRFP150MPbF

## **Absolute Maximum Ratings**

Symbol	Parameter	Max.	Units
I <sub>D</sub> @ T <sub>C</sub> = 25°C	Continuous Drain Current, V <sub>GS</sub> @ 10V	42	
I <sub>D</sub> @ T <sub>C</sub> = 100°C	Continuous Drain Current, V <sub>GS</sub> @ 10V	30	A
I <sub>DM</sub>	Pulsed Drain Current ①⑤	140	
$P_D @ T_C = 25^{\circ}C$	Maximum Power Dissipation	160	W
	Linear Derating Factor	1.1	W/°C
$V_{GS}$	Gate-to-Source Voltage	± 20	V
E <sub>AS</sub>	Single Pulse Avalanche Energy ②⑤	420	mJ
I <sub>AR</sub> Avalanche Current ①⑤		22	Α
E <sub>AR</sub>	Repetitive Avalanche Energy ①	16	mJ
dv/dt	Peak Diode Recovery dv/dt③⑤	5.0	V/ns
$T_J$	Operating Junction and	-55 to + 175	
T <sub>STG</sub>	Storage Temperature Range	-55 to + 175	°C
	Soldering Temperature, for 10 seconds (1.6mm from case)	300	
	Mounting torque, 6-32 or M3 screw	10 lbf•in (1.1N•m)	

### **Thermal Resistance**

Symbol	Parameter	Тур.	Max.	Units
$R_{ heta JC}$	Junction-to-Case		0.95	
$R_{ heta CS}$	Case-to-Sink, Flat, Greased Surface	0.24		°C/W
$R_{ heta JA}$	Junction-to-Ambient		40	

2020-05-28



# Electrical characteristics @ T<sub>J</sub> = 25°C (unless otherwise specified)

	Parameter	Min.	Тур.	Max.	Units	Conditions
V <sub>(BR)DSS</sub>	Drain-to-Source Breakdown Voltage	100			V	$V_{GS} = 0V, I_{D} = 250\mu A$
$\Delta V_{(BR)DSS}/\Delta T_J$	Breakdown Voltage Temp. Coefficient		0.11		V/°C	Reference to 25°C, I <sub>D</sub> = 1mA ⑤
R <sub>DS(on)</sub>	Static Drain-to-Source On-Resistance			0.036	Ω	V <sub>GS</sub> = 10V, I <sub>D</sub> = 23A ④
$V_{GS(th)}$	Gate Threshold Voltage	2.0		4.0	V	$V_{DS} = V_{GS}$ , $I_D = 250\mu A$
gfs	Forward Trans conductance	14			S	$V_{DS} = 25V, I_D = 22A$
ı	Drain-to-Source Leakage Current			25		$V_{DS} = 100V, V_{GS} = 0V$
IDSS	Drain-to-Source Leakage Current			250	μΑ	$V_{DS} = 80V, V_{GS} = 0V, T_{J} = 150^{\circ}C$
	Gate-to-Source Forward Leakage			100	nΛ	$V_{GS} = 20V$
IGSS	Gate-to-Source Reverse Leakage			-100	nA	$V_{GS} = -20V$

## Dynamic Electrical Characteristics @ T<sub>J</sub> = 25°C (unless otherwise specified)

$Q_g$	Total Gate Charge	 	110		I <sub>D</sub> = 22A
$Q_{gs}$	Gate-to-Source Charge	 	15	nC	$V_{DS} = 80V$
$Q_{gd}$	Gate-to-Drain Charge		58		V <sub>GS</sub> = 10V, See Fig.6 and 13 ④⑤
$t_{d(on)}$	Turn-On Delay Time	 11			$V_{DD} = 50V$
t <sub>r</sub>	Rise Time	 56		no	$I_D = 22A$
$t_{d(off)}$	Turn-Off Delay Time	 45		ns	$R_G = 3.6\Omega$
t <sub>f</sub>	Fall Time	 40			R <sub>D</sub> = 2.3Ω , See Fig.10④⑤
L <sub>D</sub>	Internal Drain Inductance	 5.0			Between lead, 6mm (0.25in.)
L <sub>S</sub>	Internal Source Inductance	 13		nH	from package and center of die contact
C <sub>iss</sub>	Input Capacitance	 1900			$V_{GS} = 0V$
$C_{oss}$	Output Capacitance	 450		рF	$V_{DS} = 25V$
$C_{rss}$	Reverse Transfer Capacitance	 230			f = 1.0MHz, See Fig.5⑤


### **Diode Characteristics**

	Parameter	Min.	Тур.	Max.	Units	Conditions
Is	Continuous Source Current (Body Diode)			42		MOSFET symbol showing the
I <sub>SM</sub>	Pulsed Source Current (Body Diode) ①			140		integral reverse p-n junction diode.
$V_{SD}$	Diode Forward Voltage			1.3	V	$T_J = 25^{\circ}C, I_S = 23A, V_{GS} = 0V $ ④
t <sub>rr</sub>	Reverse Recovery Time		180	270	ns	$T_J = 25^{\circ}C$ , $I_F = 22A$
$Q_{rr}$	Reverse Recovery Charge		1.2	1.8	μC	di/dt = 100A/µs ④

#### **Notes**

- ① Repetitive rating; pulse width limited by max. junction temperature. (See fig. 11).
- $^{\circ}$  V<sub>DD</sub> = 25V, T<sub>J</sub> = 25°C, L = 1.7mH, R<sub>G</sub> = 25 $\Omega$ , I<sub>AS</sub> = 22A.(See fig. 12).
- $\label{eq:loss_def} \text{ } 3 \quad I_{SD} \leq 22A, \text{ } di/dt \leq 180A/\mu s, \text{ } V_{DD} \leq V_{(BR)DSS}, \text{ } T_J \leq 175^{\circ}C.$
- 4 Pulse width  $\leq 300 \mu s$ ; duty cycle  $\leq 2\%$ .
- ⑤ Uses IRF1310N data and test conditions.



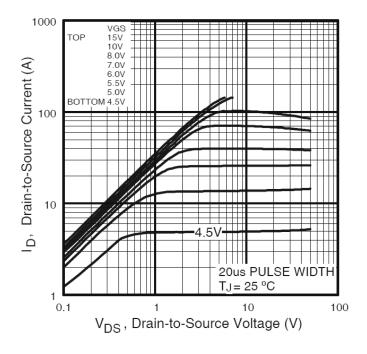


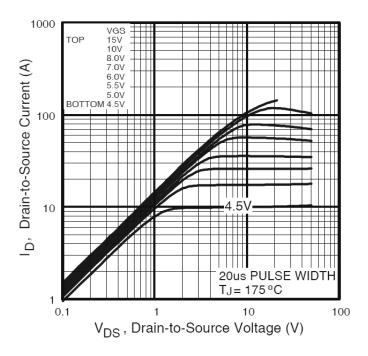


Fig. 1 Typical Output Characteristics


Fig. 2 Typical Output Characteristics

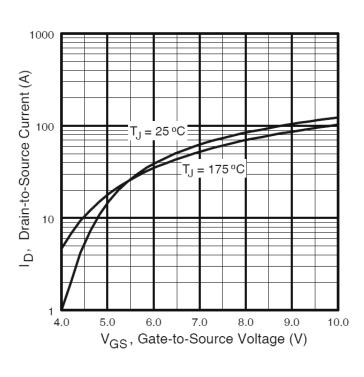

2.5 | D = 36A |

Fig. 3 Typical Transfer Characteristics


Fig. 4 Normalized On-Resistance vs. Temperature

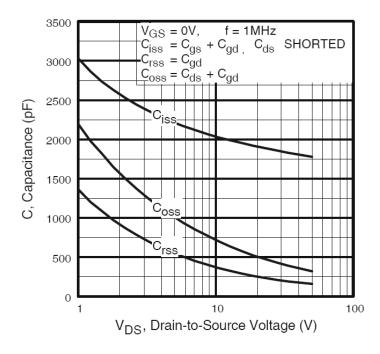


I<sub>D</sub> = 22A V<sub>DS</sub> = 80V V<sub>DS</sub> = 50V V<sub>GS</sub>, Gate-to-Source Voltage (V)  $V_{DS}^{-3} = 20V$ 16 12 8 FOR TEST CIRCUIT SEE FIGURE 13 0 0 20 40 60 80 100 120 Q<sub>G</sub>, Total Gate Charge (nC)

**Fig 5.** Typical Capacitance vs. Drain-to-Source Voltage

**Fig 6.** Typical Gate Charge vs. Gate-to-Source Voltage

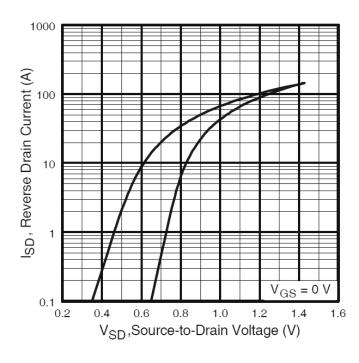



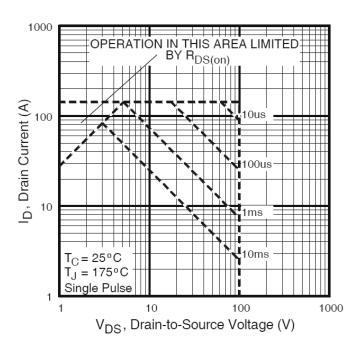


Fig 8. Maximum Safe Operating Area

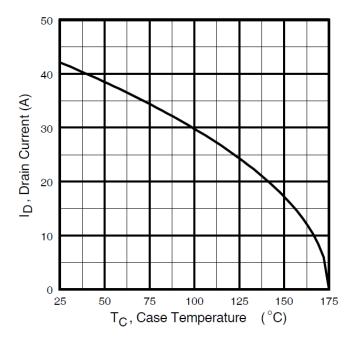


Fig 9. Maximum Drain Current vs. Case Temperature




Fig 10a. Switching Time Test Circuit




Fig 10a. Switching Time Waveforms

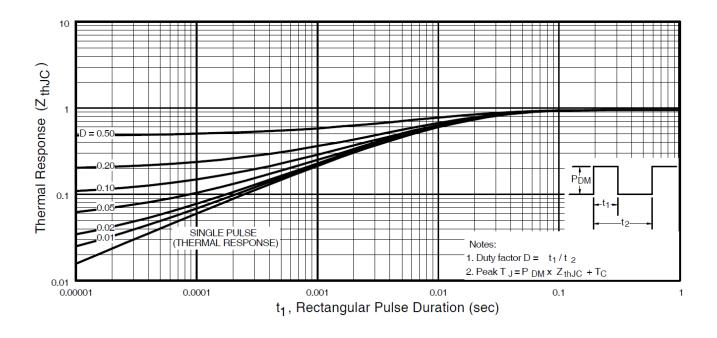


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Case






Fig. 12a. Unclamped Inductive Test Circuit




Fig. 12b. Unclamped Inductive Waveforms

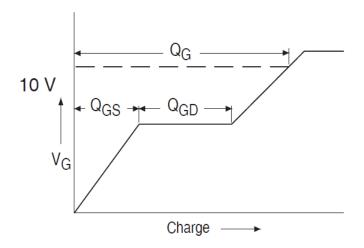
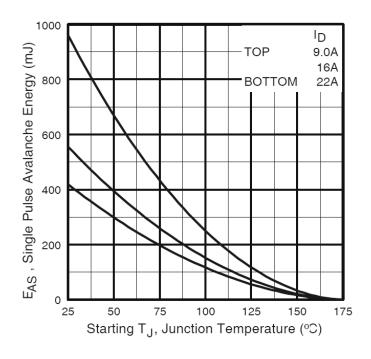


Fig 13a. Basic Gate Charge Waveform



**Fig 12c.** Maximum Avalanche Energy vs. Drain Current


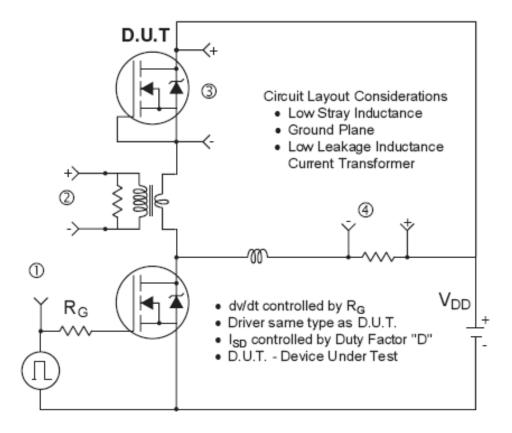


Fig 13b. Gate Charge Test Circuit






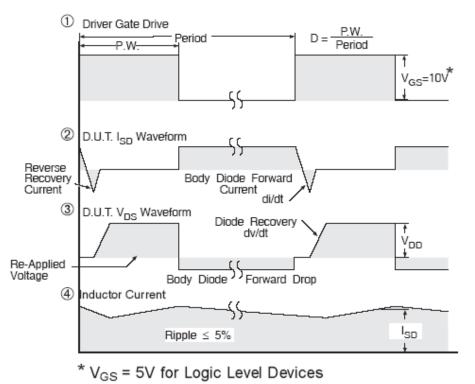


Fig 14. Peak Diode Recovery dv/dt Test Circuit for N-Channel IR MOSFET™



## TO-247AD Package Outline (Dimensions are shown in millimeters (inches))

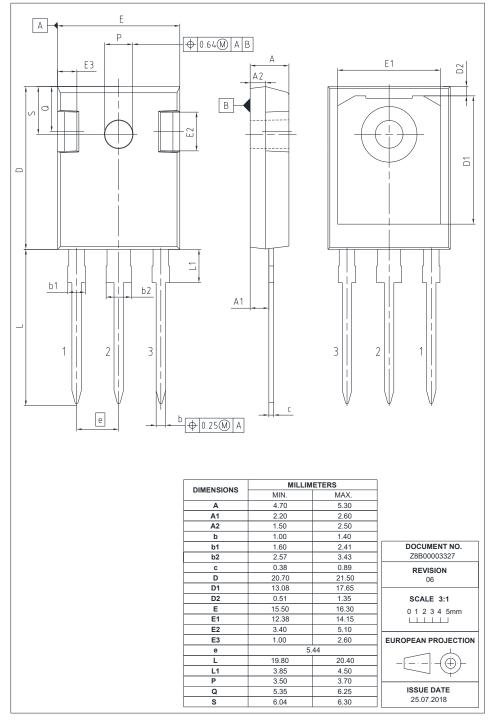


## **TO-247AD Part Marking Information**

EXAMPLE: THIS IS AN IRGP30B120KD-E WITH ASSEMBLY

LOT CODE 5657

ASSEMBLED ON WW 35, 2000 IN THE ASSEMBLY LINE "H"

Note: "P" in assembly line position indicates "Lead-Free"





### **Revision History**

Date	Comments			
	Updated datasheet with corporate template			
05/28/2020	Updated Package picture-page1			
03/20/2020	<ul> <li>Corrected from "Hexfet power MOSFET" to "IR MOSFET™" -page1 &amp;7</li> </ul>			
	Corrected part marking from TO-247AC to TO-247AD on page 8.			

Published by Infineon Technologies AG 81726 München, Germany © Infineon Technologies AG 2015 All Rights Reserved.

## **IMPORTANT NOTICE**

The information given in this document shall in <u>no event</u> be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (<a href="https://www.infineon.com">www.infineon.com</a>).

#### WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may <u>not</u> be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.