


(COTS) COMMERCIAL OFF-THE-SHELF 1.5 AMP POSITIVE ADJUSTABLE VOLTAGE REGULATOR IN TO-257 PACKAGE



Three Terminal, Precision Adjustable Positive Voltage Regulator In TO-257 Package

FEATURES

- Built In Thermal Overload Protection
- Short Circuit Current Limiting

DESCRIPTION

These three terminal positive regulators are supplied in hermetically sealed packages. All protective features are designed into the circuit, including thermal shutdown, current-limiting, and safe-area control. With heat sinking, these devices can deliver up to 1.5 amps of output current. The unit also features output voltages that can be fixed from 1.2 volts to 37 volts using external resistors.

ABSOLUTE MAXIMUM RATINGS $T_c @ 25^\circ C$

Power Dissipation

TO-257	20 W
Input - Output Voltage Differential	40 V
Operating Junction Temperature Range	- 55°C to + 150°C
Storage Temperature Range	- 65°C to + 150°C
Lead Temperature (Soldering 10 seconds)	300°C
Thermal Resistance, Junction to Case4.2°C/W
Maximum Output Current	1.5 A

3.3

Recommended Operating Conditions:

Output Voltage Range	1.2 to 37 VDC
Ambient Operating Temperature Range (T_A)	- 55°C to + 125°C
Input Voltage Range	4.25 to 41.25 VDC

ELECTRICAL CHARACTERISTICS

-55°C T_A 125°C, $I_L = 8mA$ (unless otherwise specified)

Parameter	Symbol	Test Conditions	Min.	Max.	Unit
Reference Voltage	V_{REF}	$V_{DIFF} = 3.0V, T_A = 25^\circ C$ $V_{DIFF} = 3.3V$ $V_{DIFF} = 40V$	1.20 • 1.20 • 1.20	1.30 1.30 1.30	V
Line Regulation (Note 1)	R_{LINE}	$3.0V V_{DIFF} 40V, V_{OL} = V_{REF}, T_A = 25^\circ C$ $3.3V V_{DIFF} 40V, V_{OL} = V_{REF}$	-9 • -23	9 23	mV
Load Regulation (Note 1)	R_{LOAD}	$V_{DIFF} = 3.0V, 10mA I_L 1.5A, T_A = 25^\circ C$ $V_{DIFF} = 3.3V, 10mA I_L 1.5A$ $V_{DIFF} = 40V, 10mA I_L 300mA, T_A = 25^\circ C$ $V_{DIFF} = 40V, 10mA I_L 195mA$	-15 • -15 -15 • -15	15 15 15 15	mV
Thermal Regulation	V_{RTH}	$V_{IN} = 14.6V, I_L = 1.5A$ $P_d = 20 Watts, t = 20 ms, T_A = 25^\circ C$	-16	16	mV
Ripple Rejection (Note 2)	R_N	$f = 120 Hz, V_{OL} = V_{REF}$ $C_{Adj} = 10 \mu F$	• 66		dB
Adjustment Pin Current	I_{Adj}	$V_{DIFF} = 3.0V, T_A = 25^\circ C$ $V_{DIFF} = 3.3V$ $V_{DIFF} = 40V$		100 • 100 • 100	μA
Adjustment Pin Current Change	ΔI_{Adj}	$V_{DIFF} = 3.0V, 10mA I_L 1.5A, T_A = 25^\circ C$ $V_{DIFF} = 3.3V, 10mA I_L 1.5A$ $V_{DIFF} = 40V, 10mA I_L 300mA, T_A = 25^\circ C$ $V_{DIFF} = 40V, 10mA I_L 195mA$ $3.0V V_{DIFF} 40V, T_A = 25^\circ C$ $3.3V V_{DIFF} 40V$	-5 • -5 • -5 • -5 -5 • -5	5 5 5 5 5 5	μA
Minimum Load Current	I_{min}	$V_{DIFF} = 3.0V, V_{OUT} = 1.4V (forced)$ $V_{DIFF} = 3.3V, V_{OUT} = 1.4V (forced)$ $V_{DIFF} = 40V, V_{OUT} = 1.4V (forced)$		5.0 • 5.0 • 5.0	mA
Current Limit (Note 2)	I_{L}	$V_{DIFF} = 15V$ $V_{DIFF} = 40V, T_A = 25^\circ C$	• 1.5 0.18	3.5 1.5	A



Notes:

1. Load and Line Regulation are specified at a constant junction temperature. Pulse testing with low duty cycle is used. Changes in output voltage due to heating effects must be taken into account separately.
2. If not tested, shall be guaranteed to the specified limits.
3. The • denotes the specifications which apply over the full operating temperature range.

3.3

MECHANICAL OUTLINE

PIN CONNECTION

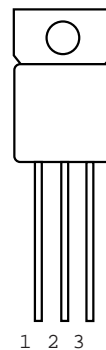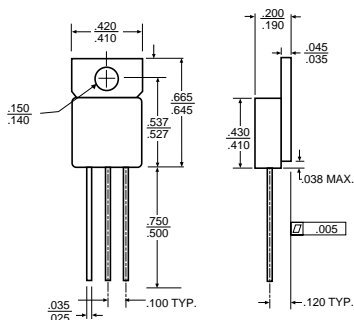

Front View
Pin 1: Adjust
Pin 2: Output
Pin 3: Input
Tab: Isolated